

PR Kitchen & Washroom Systems

83 Bangholme Rd, Dandenong South VIC 3175

Tel: 03 9700 9100

www.kwcswiss.com.au

PR Kitchen & Washroom Systems NZ Ltd

P.O Box 53171, Auckland Airport, Auckland 2150


Tel: 09 964 0400

www.kwcswiss.co.nz

International Website www.kwc.com


KWC in the kitchen

KWC
**in the
kitchen**

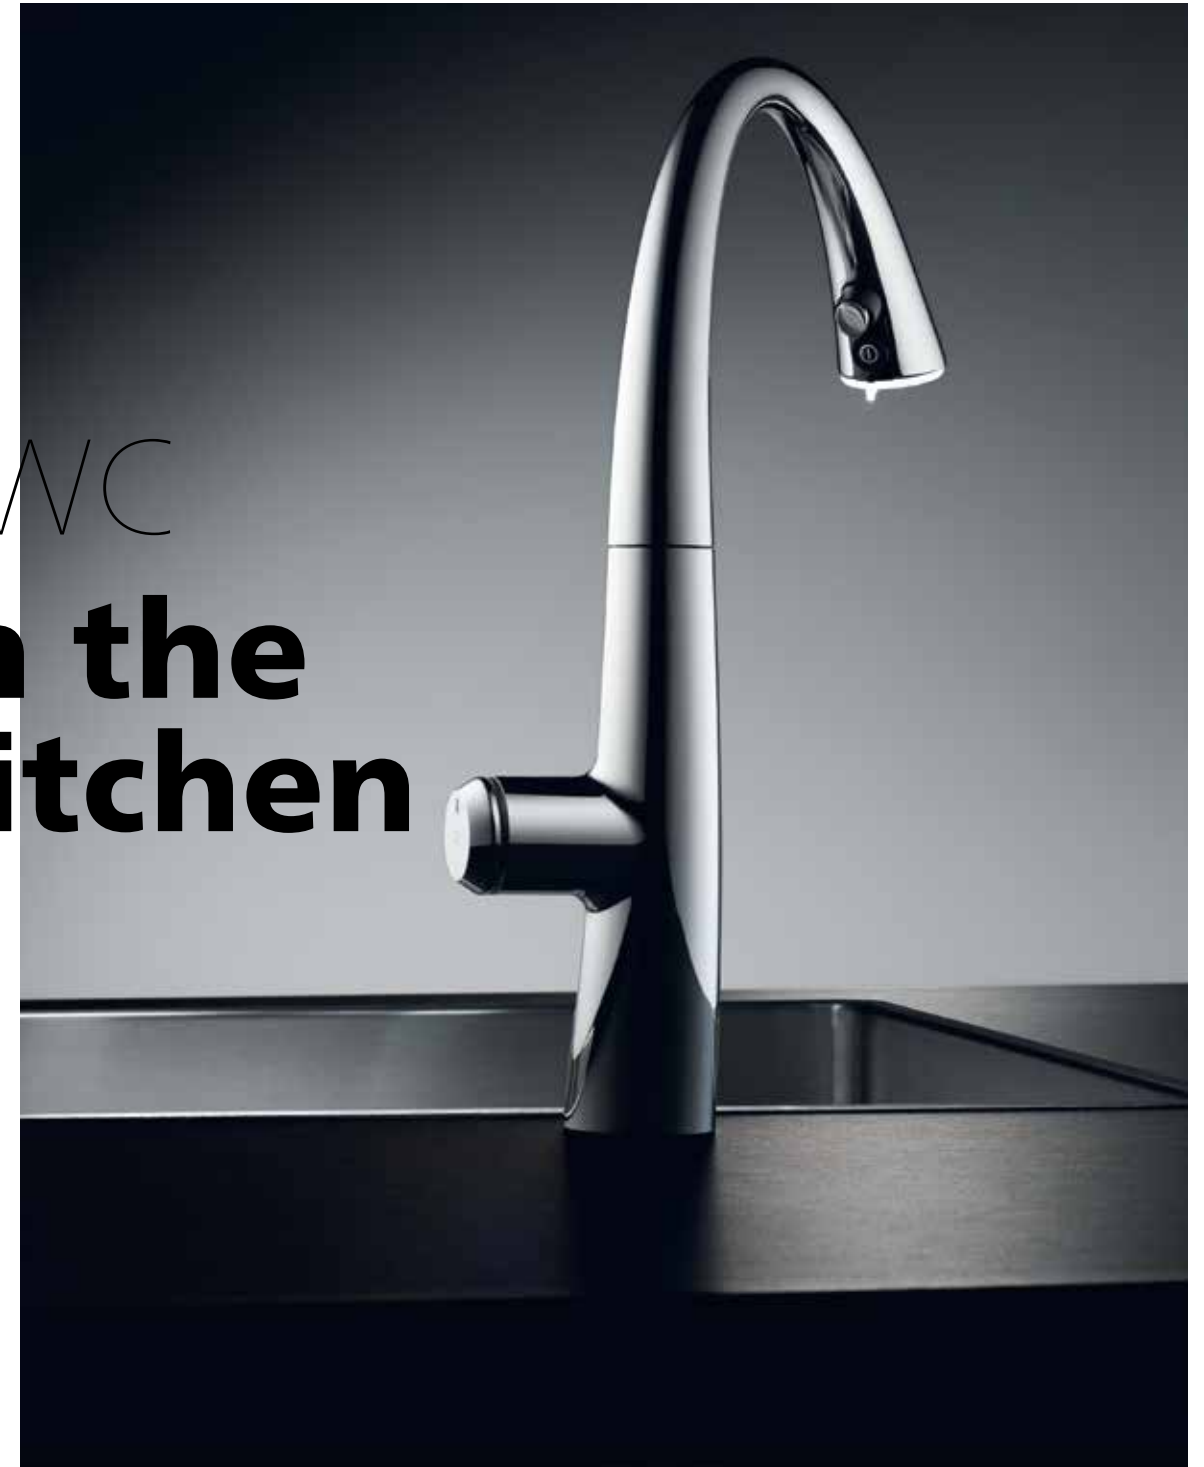

Swiss Water Experience



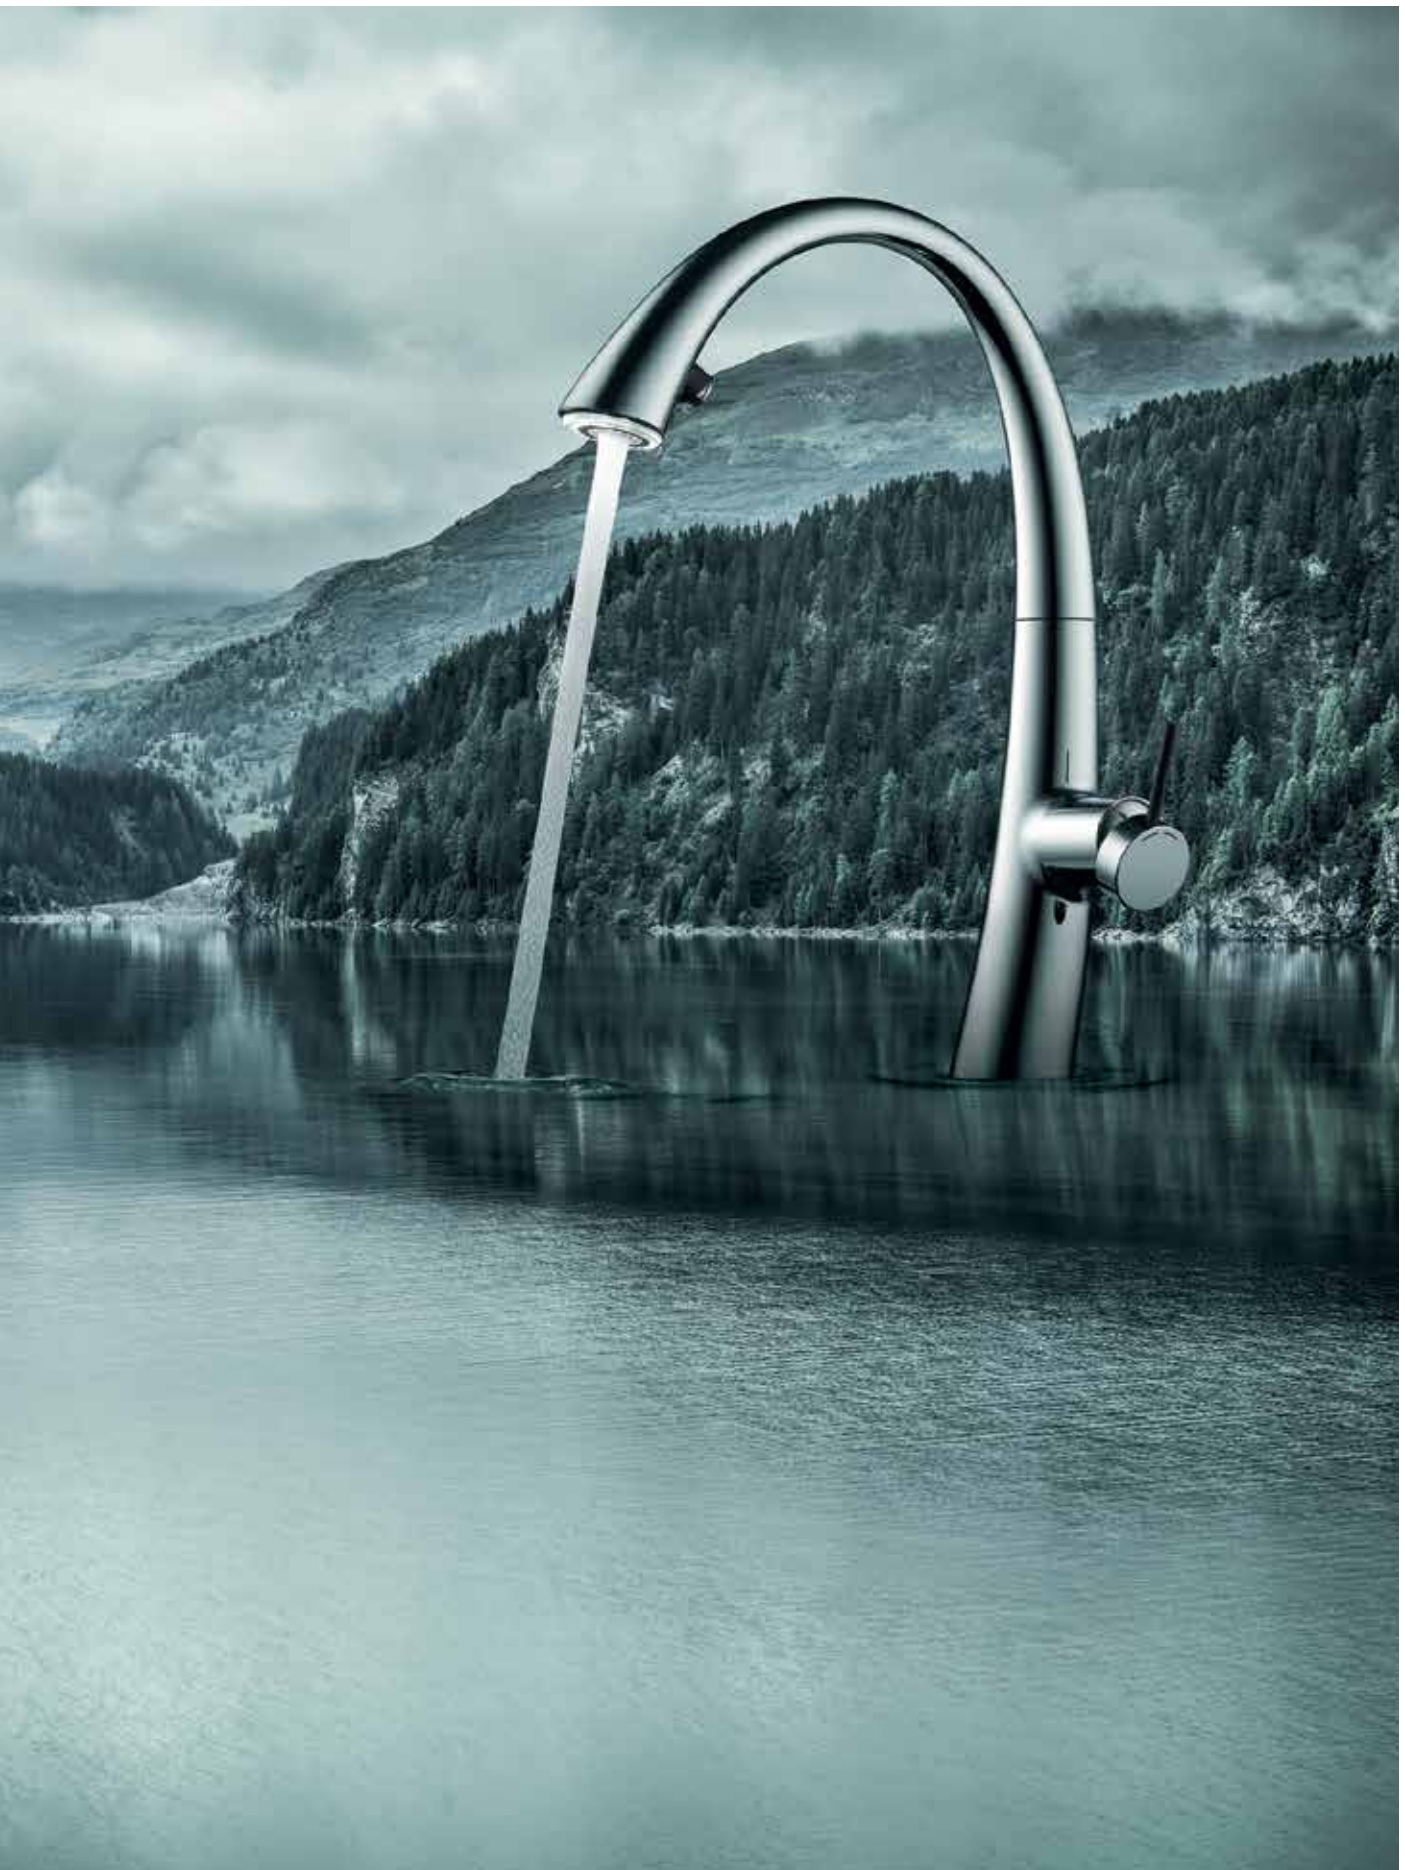



As one of the world's leading brands of high quality taps, we turn clever new ideas in the kitchen into a tangible reality that anyone can experience.

We combine innovation, precision and aesthetics in sophisticated solutions for our customers.

Innovation

KWC taps offer our customers extra value when it comes to comfort, care and investment security. Our solutions are developed in Switzerland and aim to fulfil the highest technological standards with intuitive and resource-friendly functions. This is because we share a long-term responsibility with our customers to use water, Earth's key resource, in a respectful way.

Precision

We respond to our customers high expectations with precise solutions which encapsulate 140 years of experience in working with water. This promise applies both to the proven quality of our production processes and our commitment to Switzerland as a production location. It is also reflected in our well-established cooperation with employees, partners and customers, in our reliable attention to detail and in our strong service philosophy.

Aesthetics

The shape and variety of KWC's taps symbolises the Swiss Alps and their refreshing pure water, which goes straight from the source to the consumer. Our designs have won several awards from international expert juries for their unique aesthetics and user-friendly ergonomics. The aesthetic appearance of our taps, for example, boosts our customers' trust in the KWC brand.



KWC technologies

luminaqua®



A touch of a button is all it takes for this brilliant technology to transform the jet of water from the tap into a wonderful play of light. The LEDs have a very long lifespan but use very little electricity, and the light switches off automatically after 30 to 45 minutes.

highflex®



This patented spring hose can be moved flexibly in any direction. It is also easy to clean and stays reliably and beautifully in place when it is not being used.

Neoperl® Caché



The Caché® jet regulator from Neoperl is threaded and screws directly into the tap, with no additional flow former cover needed. This means it is invisible from outside and safe from theft. The Caché® is supplied with a service key so that it can be easily removed and cleaned.

Electronically controlled



The KWC TLP (touch light PRO) operation for our electronically controlled taps is a new and very easy way to change temperature and flow rate of your KWC TLP tap. Touch once, twice or three times and you get cold, warm or hot water instantly. Temperature is indicated by a light ring from blue to red.

touchcontrol



Protection against scalding with its «double skin» construction: insulated hot water pipes ensure that the body of the pull-out spray only becomes warm at most, and never hot.

jetclean



This flexible faceplate reduces the amount of cleaning effort required. When water is flowing, the cone shaped holes expand, dislodging any limescale deposits from the surface of the faceplate. The holes contract automatically when the water flow is switched off.

turn and clean



turn and clean (tac) - the name says it all: simply turn, clean and the job is done. The faceplate on kitchen sprays can be dismantled in one single movement, making it quick and easy to clean.

turn and lock



turn and lock (tal) keeps things brief: simply press, turn and it locks into place. This keeps the jet of water from the kitchen spray flowing exactly where you want it.

flexguard™



This innovative sealing membrane keeps KWC taps watertight for a long time. It protects the control cartridge from residue left by cleaning agents and dirt. The lever support is reinforced with a metal core and integrated into the membrane, reliably preventing the lever from coming loose.

KWC cartridges



These technological masterpieces are absolutely reliable - after all, they have been tried and tested countless times. KWC cartridges feature a new integrated bottom seal that offers even more resistance against pressure surges. Some tap ranges only use KWC's safety control cartridges that come with a reinforced stopper for limiting the temperature and can also withstand a very high level of strain on the lever.



Kitchen Taps

KWC ZOE touch light PRO	10
KWC ZOE	14
KWC EVE	18
KWC INOX	22
KWC AVA	26
KWC ADRENA	30
KWC LUNA	32
KWC SIN	34
KWC ONO	38

Warranty

KWC
ZOE

touch light PRO



KWC ZOE touch light PRO is a tap controlled using smart technology. It responds intuitively to a gentle touch and is extremely easy to programme to suit your personal habits and needs. The full range of functions is encapsulated in the round operating unit, which features a ring of light that indicates what the tap is doing at any given time. So you have everything you need at your fingertips!



Touch and refresh – 1 x tap

Cold water = blue. For drinking a quick glass of water, washing fruit or preparing salad.



Touch and clean – 2 x tap


Warm water = orange. For quickly washing your hands, rinsing off a plate or filling small pans.



Touch and prepare – 3 x tap

Hot water = red. For filling pasta pans and kettles or washing up roasting tins and baking trays.

WITH LIGHT

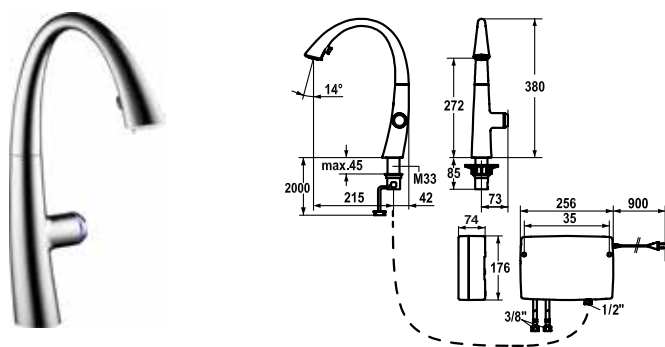

Electronically controlled tap with pull-out spray and light

KWC - No.

10.201.242.000 (Chrome)

WELS

5 Star / 6 Lpm

Flow rate

Max 500 kPa, Min 50 kPa

Covered pull-out spray

- LUMINAQUA® LED-Technology
- Neoperl® Cascade®
- Automatic diverter reset
- Up to 500 mm pull-out length
- Touch light PRO control unit, maintenance-free
- Integrated ON/OFF push-button
- Automatic shut off after 30 minutes

Cartridge

- Ceramic disks
- Flow rate and temperature continuously variable

Spout reach 220 mm

Unique hydraulic manufacturing using water pressure for sculpturing

Hose guide, swivelling 270°

Fastening by means of threaded sleeve M33 x 1.5


Mounting hole size ø35 mm

Gap between wall and centre of mounting hole min. 42 mm

luminaqua®

Electronically controlled

WITH LIGHT

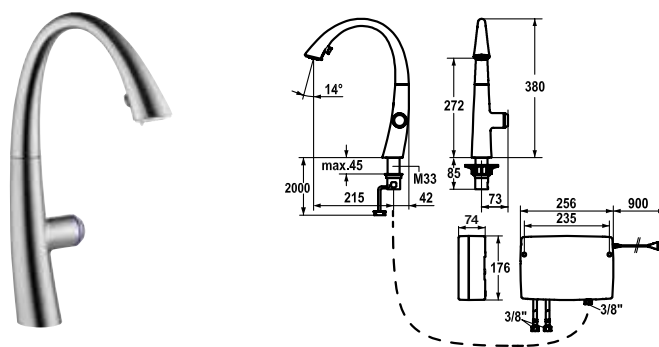

Electronically controlled tap with pull-out spray and light

KWC - No.

10.201.242.127 (Stainless steel)

WELS

5 Star / 6 Lpm

Flow rate

Max 500 kPa, Min 50 kPa

Covered pull-out spray

- LUMINAQUA® LED-Technology
- Neoperl® Cascade®
- Automatic diverter reset
- Up to 500 mm pull-out length
- Touch light PRO control unit, maintenance-free
- Integrated ON/OFF push-button
- Automatic shut off after 30 minutes

Cartridge

- Ceramic disks
- Flow rate and temperature continuously variable

Spout reach 220 mm

Unique hydraulic manufacturing using water pressure for sculpturing

Hose guide, swivelling 270°



Fastening by means of threaded sleeve M33 x 1.5

Mounting hole size ø35 mm

Gap between wall and centre of mounting hole min. 42 mm

luminaqua®

Electronically controlled

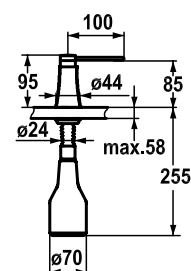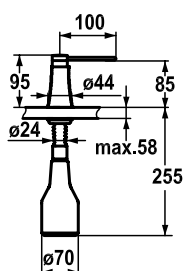

Soap dispenser

KWC - No.

Z.536.586.000 (Chrome)

Scope of delivery

- Pump
- Soap container, filling capacity 300ml

Mounting hole size $\varnothing 26$ mm

Easy refillable from surface without disassembly

Soap dispenser

KWC - No.

Z.536.586.127 (Stainless steel)

Scope of delivery

- Pump
- Soap container, filling capacity 300ml


Mounting hole size $\varnothing 26$ mm

Easy refillable from surface without disassembly

KWC ZOE

All of the latest trends in architecture and interior design have been incorporated into the development of the KWC ZOE. In short, KWC ZOE brings a whole new level of luxury to your kitchen.



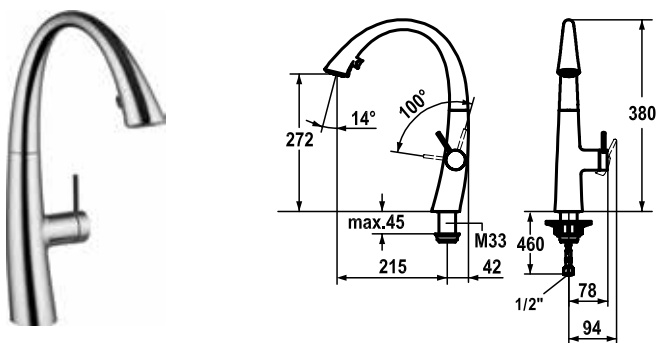

Swivel tap with pull-out spray

KWC - No.

10.201.102.000 (Chrome)
10.201.102.127 (Stainless steel)

WELS

5 Star / 6 Lpm

Flow rate

Max 500 kPa, Min 50 kPa

Covered pull-out spray

- KWC JETCLEAN technology
- Neoperl® Cascade®
- Automatic diverter reset
- Up to 500 mm pull-out length
- Ergonomic spout alignment, shape and handling

KWC cartridge (S 25)

- Ceramic disks
- Flow rate and temperature continuously variable

Spout reach 220 mm

Unique hydraulic manufacturing using water pressure for sculpturing

Child safety: Cold water flow in lever position towards the front

Lever installation only possible on the right side


Hose guide, swivelling 270°

Fastening by means of threaded sleeve M33 x 1.5

Mounting hole size ø35 mm

Gap between wall and centre of mounting hole min. 42 mm

turn and clean
jetclean

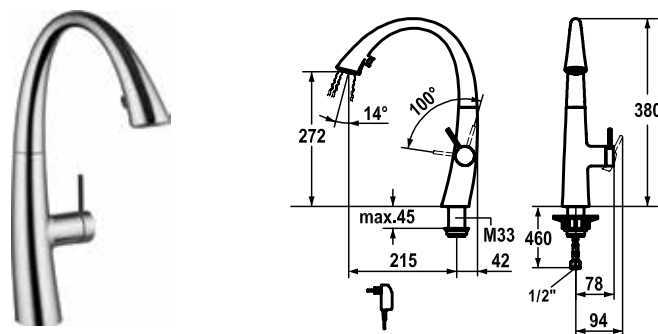

Swivel tap with pull-out spray and light

KWC - No.

10.201.122.000 (Chrome)
10.201.122.127 (Stainless steel)

WELS

5 Star / 6 Lpm

Flow rate

Max 500 kPa, Min 50 kPa

Covered pull-out spray

- LUMINAQUA® LED-Technology
- KWC JETCLEAN technology
- Neoperl® Cascade®
- Automatic diverter reset
- Integrated ON/OFF push-button
- Automatic shut off after 30 minutes
- Up to 500 mm pull-out length
- Ergonomic spout alignment, shape and handling

KWC cartridge (S 25)

- Ceramic disks
- Flow rate and temperature continuously variable

Scope of delivery

- Mains receiver 100-240 V
- Operating voltage 6.75 V
- Cable length 1100 mm

Spout reach 220 mm

Unique hydraulic manufacturing using water pressure for sculpturing

Child safety: Cold water flow in lever position towards the front

Lever installation only possible on the right side

Hose guide, swivelling 270°


Fastening by means of threaded sleeve M33 x 1.5

Mounting hole size ø35 mm

Gap between wall and centre of mounting hole min. 42 mm

luminaqua®
turn and clean
jetclean

WITH LIGHT

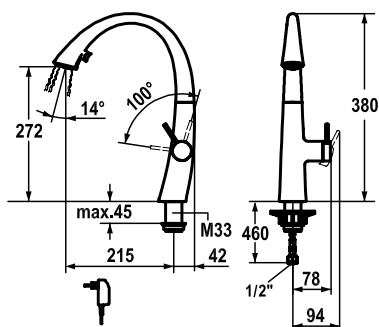

Swivel tap with pull-out spray and light

KWC - No.

10.201.122.150 (Glacier white)

WELS

5 Star / 6 Lpm

Flow rate

Max 500 kPa, Min 50 kPa

Covered pull-out spray

- LUMINAQUA® LED-Technology
- KWC JETCLEAN technology
- Neoperl® Cascade®
- Automatic diverter reset
- Integrated ON/OFF push-button
- Automatic shut off after 30 minutes
- Up to 500 mm pull-out length
- Ergonomic spout alignment, shape and handling

KWC cartridge (S 25)

- Ceramic disks
- Flow rate and temperature continuously variable

Scope of delivery

- Mains receiver 100-240 V
- Operating voltage 6.75 V
- Cable length 1100 mm

Spout reach 220 mm

Unique hydraulic manufacturing using water pressure for sculpturing

Child safety: Cold water flow in lever position towards the front

Lever installation only possible on the right side

Hose guide, swivelling 270°


Fastening by means of threaded sleeve M33 x 1.5

Mounting hole size ø35 mm

Gap between wall and centre of mounting hole min. 42 mm

luminaqua®
turn and clean
jetclean

WITH LIGHT

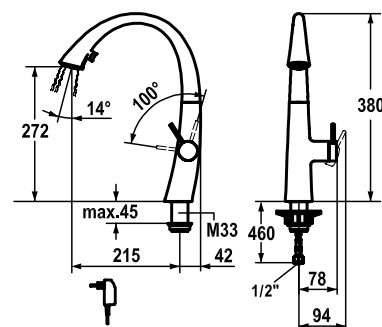

Swivel tap with pull-out spray and light

KWC - No.

10.201.122.106 (Black chrome)

WELS

5 Star / 6 Lpm

Flow rate

Max 500 kPa, Min 50 kPa

Covered pull-out spray

- LUMINAQUA® LED-Technology
- KWC JETCLEAN technology
- Neoperl® Cascade®
- Automatic diverter reset
- Integrated ON/OFF push-button
- Automatic shut off after 30 minutes
- Up to 500 mm pull-out length
- Ergonomic spout alignment, shape and handling

KWC cartridge (S 25)

- Ceramic disks
- Flow rate and temperature continuously variable

Scope of delivery

- Mains receiver 100-240 V
- Operating voltage 6.75 V
- Cable length 1100 mm

Spout reach 220 mm

Unique hydraulic manufacturing using water pressure for sculpturing

Child safety: Cold water flow in lever position towards the front

Lever installation only possible on the right side


Hose guide, swivelling 270°

Fastening by means of threaded sleeve M33 x 1.5

Mounting hole size ø35 mm

Gap between wall and centre of mounting hole min. 42 mm

luminaqua®
turn and clean
jetclean

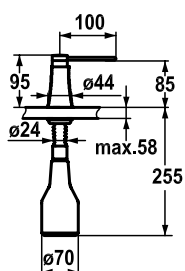

Soap dispenser


KWC - No.

Z.536.586.000 (Chrome)
Z.536.586.127 (Stainless steel)

Scope of delivery

- Pump
- Soap container, filling capacity 300ml

Mounting hole size $\varnothing 26$ mm
Easy refillable from surface without disassembly

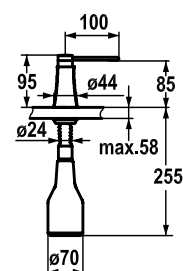

Soap dispenser


KWC - No.

Z.536.586.106 (Black chrome)

Scope of delivery

- Pump
- Soap container, filling capacity 300ml

Mounting hole size $\varnothing 26$ mm
Easy refillable from surface without disassembly

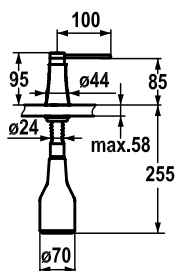

Soap dispenser

KWC - No.

Z.536.586.150 (Glacier white)

Scope of delivery



- Pump
- Soap container, filling capacity 300ml

Mounting hole size $\varnothing 26$ mm
Easy refillable from surface without disassembly

KWC EVE

Designed to appeal to your sense of elegance. The integrated LEDs illuminate the jet of water to create an enchanting sculpture of light. KWC EVE is a shiny example of sustainable innovation.



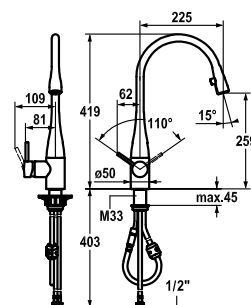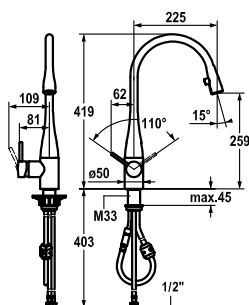

Swivel tap with pull-out aerator

KWC - No.

10.111.103.000 (Chrome)
10.111.103.700 (Stainless steel)

WELS

5 star / 6 Lpm

Flow rate

Max 500 kPa, Min 50 kPa

Covered pull-out aerator

- Neoperl® Caché®
- Up to 600 mm pull-out length

KWC cartridge (M 35)

- Ceramic disks
- Flow rate and temperature continuously variable

Spout reach 225 mm

Lever installation possible on the right or left side

Hose guide, swivelling 270°

Neoperl® Caché

Swivel tap with pull-out aerator and light

KWC - No.

10.121.103.000 (Chrome)
10.121.103.700 (Stainless steel)

WELS

5 star / 6 Lpm

Flow rate

Max 500 kPa, Min 50 kPa

Covered pull-out aerator

- LUMINAQUA® LED-technology
- Neoperl® Caché®
- Up to 600 mm pull-out length
- Integrated ON/OFF push-button
- Automatic shut off after 45 minutes

KWC cartridge (M 35)

- Ceramic disks
- Flow rate and temperature continuously variable

Scope of delivery

- Mains receiver 100-240 V
- Operating voltage 6.75 V 1100m
- Cable length 1100mm


Spout reach 225 mm

Lever installation possible on the right or left side

Hose guide, swivelling 270°

luminaqua®
Neoperl® Caché

WITH LIGHT

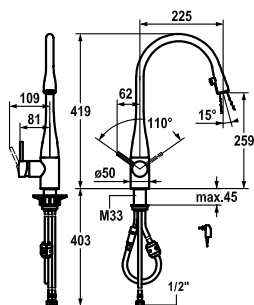**Swivel tap with pull-out aerator and light****KWC - No.**

10.121.103.150 (Glacier white)

WELS

5 star / 6 Lpm

Flow rate

Max 500 kPa, Min 50 kPa

Covered pull-out aerator

- LUMINAQUA® LED-technology
- Neoperl® Caché®
- Up to 600 mm pull-out length
- Integrated ON/OFF push-button
- Automatic shut off after 45 minutes

KWC cartridge (M 35)

- Ceramic disks
- Flow rate and temperature continuously variable

Scope of delivery

- Mains receiver 100-240 V
- Operating voltage 6.75 V 1100m
- Cable length 1100mm


Spout reach 225 mm

Lever installation possible on the right or left side

Hose guide, swivelling 270°

luminaqua®
Neoperl® Caché

WITH LIGHT

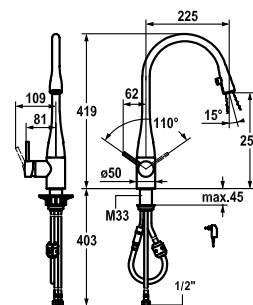**Swivel tap with pull-out aerator and light****KWC - No.**

10.121.103.151 (Black chrome)

WELS

5 star / 6 Lpm

Flow rate

Max 500 kPa, Min 50 kPa

Covered pull-out aerator

- LUMINAQUA® LED-technology
- Neoperl® Caché®
- Up to 600 mm pull-out length
- Integrated ON/OFF push-button
- Automatic shut off after 45 minutes

KWC cartridge (M 35)

- Ceramic disks
- Flow rate and temperature continuously variable

Scope of delivery



- Mains receiver 100-240 V
- Operating voltage 6.75 V 1100m
- Cable length 1100mm

Spout reach 225 mm

Lever installation possible on the right or left side

Hose guide, swivelling 270°

luminaqua®
Neoperl® Caché

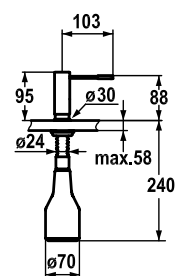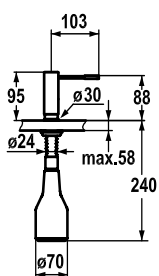

Soap dispenser

KWC - No.

Z.536.063.000 (Chrome)
Z.536.063.700 (Stainless steel)

Scope of delivery

- Pump
- Soap container, filling capacity 300 ml

Mounting hole size $\varnothing 26$ mm

Easy refillable from surface without disassembly

Soap dispenser

KWC - No.

Z.536.063.150 (Glacier white)
Z.536.063.151 (Black chrome)

Scope of delivery

- Pump
- Soap container, filling capacity 300 ml


Mounting hole size $\varnothing 26$ mm

Easy refillable from surface without disassembly

KWC INOX

Made of stainless steel, this tap is as immaculate and robust as its material suggests. The elegant and sleek design guarantees a sparkling appearance for KWC INOX in any modern kitchen.



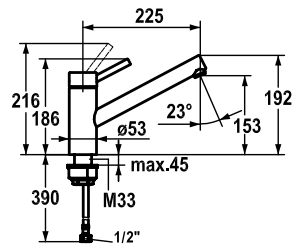

Swivel tap

KWC - No.

10.271.023.700

Finish

Stainless steel

WELS

4 star / 7.5 Lpm

Flow rate

Max 500 kPa, Min 50 kPa

Swivel spout 160°



- Neoperl® Caché®

KWC cartridge (L 39)

- Ceramic disks
- Flow rate and temperature continuously variable

Spout reach 225 mm

Neoperl® Caché

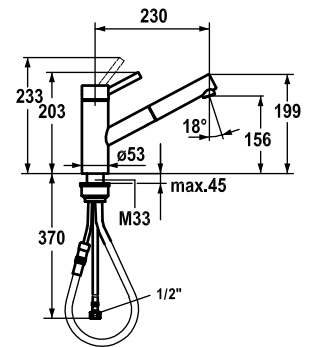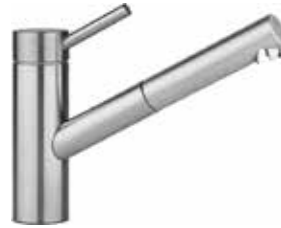

Swivel tap with pull-out aerator

KWC - No.

10.271.103.700

Finish

Stainless steel

WELS

4 star / 7.5 Lpm

Flow rate

Max 500 kPa, Min 50 kPa

Pull-out aerator

- Neoperl® Caché®
- Up to 700 mm pull-out length


KWC cartridge (L 39)

- Ceramic disks
- Flow rate and temperature continuously variable
- Temperature and flow rate limitation

Spout reach 225 mm

Hose guide, swivelling 130°

Neoperl® Caché

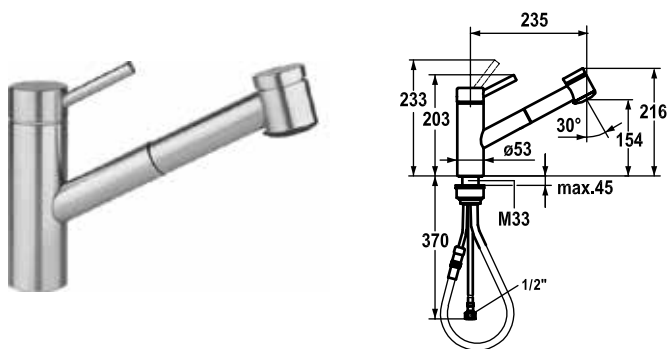

Swivel tap with pull-out spray

KWC - No.

10.271.033.700

Finish

Stainless steel

WELS

4 star / 7.5 Lpm

Flow rate

Max 500 kPa, Min 50 kPa


Pull-out spray KWC JETCLEAN

- Lockable needle spray
- Up to 700 mm pull-out length
- Automatic diverter reset

KWC cartridge (L 39)

- Ceramic disks
- Flow rate and temperature continuously variable
- Temperature and flow rate limitation

Spout reach 235 mm

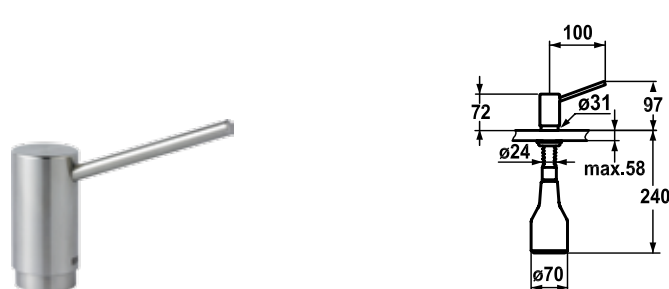

Soap dispenser

KWC - No.

Z.536.062.700 (Stainless steel)

Scope of delivery

- Pump
- Soap container, filling capacity 300 ml

Mounting hole size $\varnothing 26$ mm

Easy refillable from surface without disassembly


Neoperl® Caché turn and lock



KWC AWA

Will satisfy both your fine sense of style
and your requirement for reliable Swiss
quality and state-of-the-art technology.
Simply beautiful. Simply water.



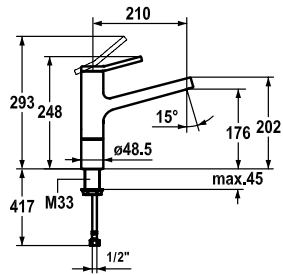

Swivel tap

KWC - No.

10.191.023.000

Finish

Chrome

WELS

5 star / 6 Lpm

Flow rate

Max 500 kPa, Min 50 kPa

Swivel spout 160°

- Neoperl® Caché®

KWC Cartridge (M 35)


- Ceramic disks
- Flow rate and temperature continuously variable

Spout reach 210 mm

Fastening by means of threaded sleeve M33 x 1.5

Mounting hole size Ø35 mm

Neoperl® Caché

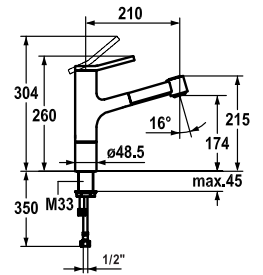

Swivel tap with pull-out spray

KWC - No.

10.191.033.000

Finish

Chrome

WELS

5 star / 6 Lpm

Flow rate

Max 500 kPa, Min 50 kPa

Pull-out spray KWC JETCLEAN

- Automatic diverter reset
- Up to 700 mm pull-out length

KWC Cartridge (M 35)

- Ceramic disks
- Flow rate and temperature continuously variable


Spout reach 210 mm

Fastening by means of threaded sleeve M33 x 1.5

Mounting hole size Ø35 mm

Hose guide, swivelling 130°

jetclean

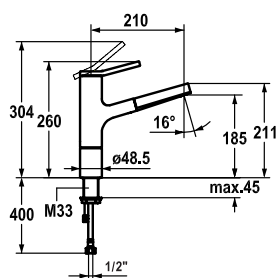

Swivel tap with pull-out aerator

KWC - No.

10.191.113.000

Finish

Chrome

WELS

5 star / 6 Lpm

Flow rate

Max 500 kPa, Min 50 kPa

Pull-out aerator

- Neoperl® Caché®
- Up to 700 mm pull-out length

KWC Cartridge (M 35)

Ceramic disks

Flow rate and temperature continuously variable


Spout reach 210 mm

Fastening by means of threaded sleeve M33 x 1.5

Mounting hole size ø35 mm

Hose guide, swivelling 130°

Neoperl® Caché

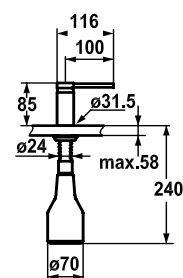

Soap dispenser

KWC - No.

Z.536.159.000

Finish

Chrome

Scope of delivery

- Pump
- Soap container, filling capacity 300 ml

Mounting hole size ø26 mm


Easy refillable from surface without disassembly



KWC ADRENA

With its cleverly thought-out lever design, KWC ADRENA responds to the movements of your hand and its flattened tip makes it naturally smooth to operate.



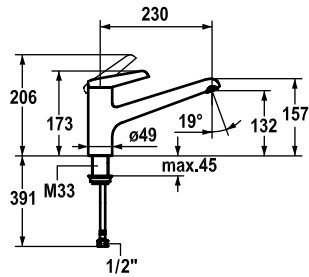

Swivel tap

KWC - No.

10.321.023.000

Finish

Chrome

WELS

4 star / 7.5 Lpm

Flow rate

Max 500 kPa, Min 50 kPa

Swivel spout 160°

- Neoperl® Cascade®


KWC cartridge (M 35)

- Ceramic disks
- Flow rate and temperature continuously variable

Spout reach 230 mm

Fastening by means of threaded sleeve M33 x 1.5

Mounting hole size ø35 mm

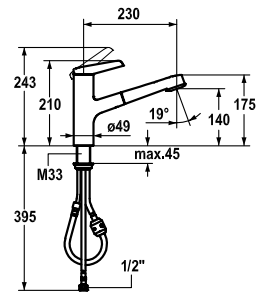

Swivel tap with pull-out spray

KWC - No.

10.321.033.000

Finish

Chrome

WELS

4 star / 7.5 Lpm

Flow rate

Max 500 kPa, Min 50 kPa

Pull-out spray KWC JETCLEAN

- Automatic diverter reset
- Up to 600 mm pull-out length

KWC cartridge (M 35)

- Ceramic disks
- Flow rate and temperature continuously variable

Spout reach 230 mm

Hose guide, swivelling 130°

Fastening by means of threaded sleeve M33 x 1.5


Mounting hole size ø35 mm

jetclean
turn and clean

KWC LUNA

The slim design of this tap range will take the character of your kitchen to a whole new level. With its amazing variety of functions, KWC LUNA is simply the obvious choice.



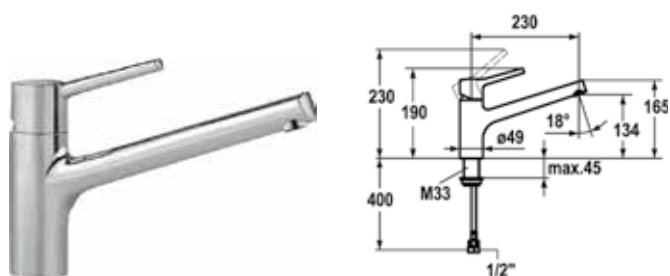

Swivel tap

KWC - No.

10.211.023.000

Finish

Chrome

WELS

4 star / 7.5 Lpm

Flow rate

Max 500 kPa, Min 50 kPa


Swivel spout 270°

- Neoperl® Cascade®

KWC cartridge (M 35)

- Ceramic disks
- Flow rate and temperature continuously variable

Spout reach 230 mm

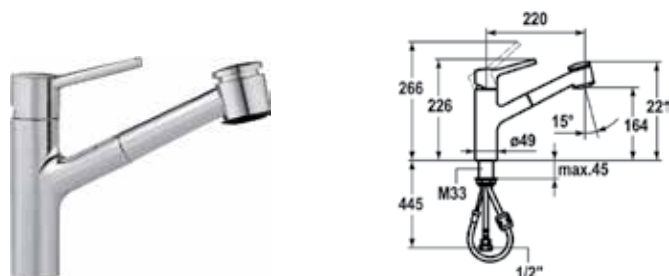

Swivel tap with pull-out spray

KWC - No.

10.211.033.000

Finish

Chrome

WELS

4 star / 7.5 Lpm

Flow rate

Max 500 kPa, Min 50 kPa

Pull-out spray KWC JETCLEAN

- Neoperl® Caché®
- Up to 700 mm pull-out length

KWC cartridge (M 35)

- Ceramic disks
- Flow rate and temperature continuously variable

Spout reach 220 mm


Hose guide, swivelling 130°

jetclean
turn and clean

KWC SIN

This range is available in three different versions and makes an impressive impact in terms of both its stylish design and functional versatility. In short, KWC SIN stimulates your senses just as much as it appeals to your good sense.



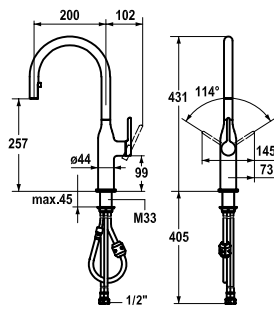

Swivel tap with pull-out aerator

KWC - No.

10.261.102.000

Finish

Chrome

WELS

5 star / 6 Lpm

Flow rate

Max 500 kPa, Min 50 kPa

Pull-out aerator covered

- Neoperl® Caché®
- Up to 500 mm pull-out length

KWC cartridge (L 39)

- Ceramic disks
- Flow rate and temperature continuously variable

Spout reach 200 mm


Lever installation possible on the right or left side

Hose guide, swivelling 360°

Fastening by means of threaded sleeve M33 X 1.5

Mounting hole size ø35 mm

**Neoperl® Caché
jetclean**

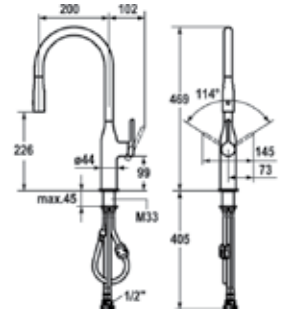

Swivel tap with pull-out spray

KWC - No.

10.261.002.000

Finish

Chrome

WELS

5 star / 6 Lpm

Flow rate

Max 500 kPa, Min 50 kPa

Pull-out spray KWC JETCLEAN

- KWC JETCLEAN technology
- Neoperl® Caché®
- Up to 500 mm pull-out length
- Automatic diverter reset

KWC cartridge (S 25)

- Ceramic disks
- Flow rate and temperature continuously variable


Spout reach 200 mm

Lever installation possible on the right or left side

Hose guide, swivelling 360°

Fastening by means of threaded sleeve M33 X 1.5

**Neoperl® Caché
jetclean**

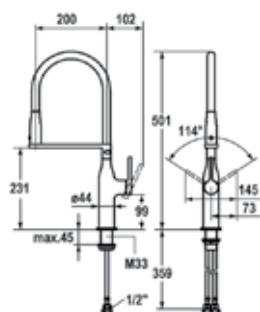

Highflex tap with spray

KWC - No.

10.261.432.000

Finish

Chrome

WELS

5 star / 6 Lpm

Flow rate

Max 500 kPa, Min 50 kPa

Swivel spout 360°

- Highflex® patented spring hose technology
- KWC JETCLEAN technology
- Neoperl® Caché®
- Automatic diverter reset

KWC cartridge (S 25)

- Ceramic disks
- Flow rate and temperature continuously variable

Spout reach 200 mm

Lever installation possible on the right or left side

Hose guide, swivelling 360°

Fastening by means of threaded sleeve M33 X 1.5

Mounting hole size 35 mm


Neoperl® Caché
jetclean



KWC ONO

Is a simple kitchen tap that is not only designed to be extra robust, but also has an exceptionally fine finish. KWC ONO is the perfect picture of elegance.



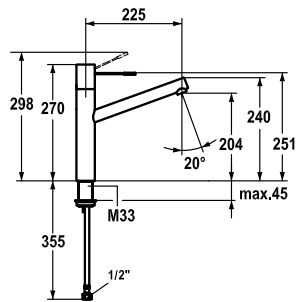

Swivel tap

KWC - No.

10.151.023.000 (Chrome)
10.151.023.700 (Stainless steel)

WELS

5 star / 6 Lpm

Flow rate

Max 500 kPa, Min 50 kPa

Swivel spout 270°

- Surgical-grade hardened Stainless steel lever
- Neoperl® Caché®


KWC cartridge (M 35)

- Ceramic disks
- Flow rate and temperature continuously variable

Spout reach 225 mm

Fastening by means of threaded sleeve M33 X 1.5

Mounting hole size $\varnothing 35$ mm

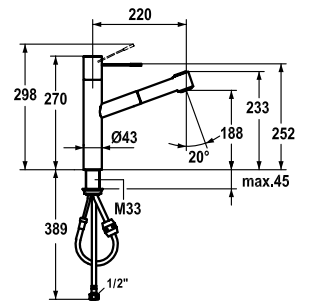

Swivel tap with pull-out spray

KWC - No.

10.151.033.000 (Chrome)
10.151.033.700 (Stainless steel)

WELS

5 star / 6 Lpm

Flow rate

Max 500 kPa, Min 50 kPa

Pull-out spray KWC JETCLEAN

- Surgical-grade hardened Stainless steel lever
- Automatic diverter reset in handspray
- Up to 700 mm pull-out length

KWC cartridge (M 35)


- Ceramic disks
- Flow rate and temperature continuously variable

Spout reach 220 mm

Hose guide, swivelling 105°

Neoperl® Caché

Neoperl® Caché

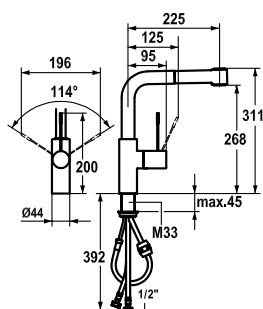

Swivel tap with pull-out spray

KWC - No.

10.151.003.000

Finish

Chrome

WELS

5 star / 6 Lpm

Flow rate

Max 500 kPa, Min 50 kPa

Pull-out spray KWC JETCLEAN

- Surgical-grade hardened Stainless steel lever
- Automatic diverter reset in handspray
- Up to 700 mm pull-out length

KWC cartridge (M 35)

- Ceramic disks
- Flow rate and temperature continuously variable

Spout reach 225 mm


Lever installation possible on the right or left side

Hose guide, swivelling 360°

Mounting hole size Ø35 mm

Fastening by means of threaded sleeve M33 X 1.5

jetclean

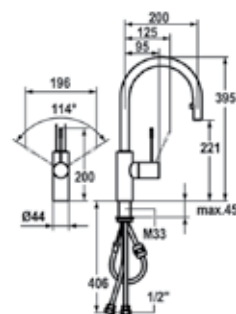

Swivel tap with pull-out aerator

KWC - No.

10.151.102.000 (Chrome)

10.151.102.700 (Stainless steel)

Finish

Chrome

WELS

5 star / 6 Lpm

Flow rate

Max 500 kPa, Min 50 kPa

Pull-out aerator covered

- Surgical-grade hardened Stainless steel lever
- Neoperl® Caché®
- Up to 700 mm pull-out length

KWC cartridge (M 35)

- Ceramic disks
- Flow rate and temperature continuously variable



Spout reach 200 mm

Fastening by means of threaded sleeve M33 X 1.5

Lever installation possible on the right or left side

Hose guide, swivelling 360°

Neoperl® Caché

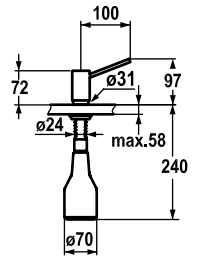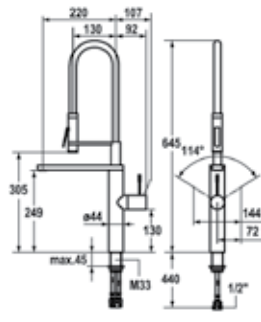

Highflex® tap with lever activated spray

KWC - No.

10.151.423.000

Finish

Chrome

WELS

4 star / 7.5 Lpm

Flow rate

Max 500 kPa, Min 50 kPa

Swivel spout 360°

- Surgical-grade hardened Stainless steel lever
- Neoperl® Slim®
- Highflex® patented spring hose technology

KWC cartridge (M 35)

- Ceramic disks
- Flow rate and temperature continuously variable

Scope of delivery

- Spray holder Z.535.963

Spout reach 220 mm

Highflex® patented spring hose technology

2 hole

Lever installation possible on the right or left side

Integrated vacuum diversion

Professional spray 360° turn

Flexible connection hoses

Soap dispenser

KWC - No.

Z.536.060.000 (Chrome)

Z.536.060.700 (Stainless steel)

Scope of delivery

- Surgical-grade hardened Stainless steel lever pump
- Soap container, filling capacity 300 ml

Mounting hole size $\varnothing 26$ mm

Easy refillable from surface without disassembly

highflex®

WARRANTY

15 YEAR WARRANTY

- Fifteen (15) year warranty applies to replacement ceramic cartridge.
- Five (5) years parts and labour starting from date of purchase of product. Plus further included period from purchase date to installation date but only up to a max. six (6) months.
- After five (5) years, a further additional ten (10) years replacement ceramic cartridge incorporated in product warranty is applicable. This extended part-only warranty is non-transferable and applies only to the original purchaser.
- Two (2) years - Electronic products and components (including lights) starting from date of purchase of the product. Plus a further included period from purchase date to installation date but only up to a max of (6) months.
- Any faults caused by defective production will be replaced free-of-charge during the guarantee period.
- Any such faults will be replaced, at the sole discretion of KWC, either by repairing faulty components or by replacing the whole product with the same or an equivalent model where the balance of the warranty period from the original date of purchase will take effect. The Company is not liable for damage caused by: a) improper or unsuitable use and/or maintenance - b) transport - c) knocks, tampering, incorrect repairs and repairs made by unauthorised technicians - d) normal wear of components (non-return valve, membrane, etc.) and/or the use of non-original spare parts - e) non-compliance with the technical instructions - f) freezing and/or impurities in the water pipes.
- The guarantee only applies if a document proving the date of purchase is produced.
- The guarantee does not cover product assembly or disassembly charges, visits and calls of specialised technicians, costs borne by the customer due to the unavailability and/or non-use of the product.
- Any imperfections in the finishes or in the natural materials used should not be considered as faults but a typical characteristic of these crafted products.
- In the case of various accessible visible components and products requiring only minor rectification under guarantee, KWC reserves the right to supply these on a "parts only" basis to the customer. Such articles may include accessories, aerators, hand sprays, hoses, handles, levers, fixings, washers and dress fittings, etc.
- To the extent permitted by law, KWC will not be liable for any claimed loss or damages to furniture, cabinetry, floor materials or coverings, walls, foundations, fixtures or any other consequential loss due to any defect in the product or components.
- All tapware purchased prior to November 2011 (Australia) or October 2015 (New Zealand) is subject to 5 years parts and labour warranty.

IMPORTANT INFORMATION

- Tap must be installed with pressure limiting valves.
- Flush out pipe work prior to connecting your new mixer.
- All mixers to be installed with isolating stop cocks.
- Mixer should be installed by a qualified plumber.
- This mixer is designed for domestic use only.
- Failure to comply will void all warranty.

KWC has a service network in all metropolitan areas and most regional areas. Where the warranty claim has been made outside a radius of 50km from any store where the product can be purchased, the customer is responsible for the cost of delivery to the nearest service agent or the travel cost for a technician to travel to a location outside the 50km radius, unless agreed otherwise with the company.

Should you ever need to make a warranty related enquiry about your KWC product, simply call (03) 9700 9100 to speak with our friendly customer service consultants. We suggest you have the following information close at hand to make the process as easy as possible:

1. Model number of your tap
2. A copy of your original purchase receipt
3. Address details of where the tap is installed Alternatively, you may email, fax or post a service request to the details provided below.

Any associated or ancillary costs to be incurred by you as a result of replacement or repair of KWC taps under this guarantee shall, in all cases, be previously approved by PR Kitchen & Washroom Systems Pty Ltd. Please note: The benefits provided under this warranty are additional to other rights and remedies available to the customer under the Australian Customer Law.

YOUR STATUTORY RIGHTS

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or a refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

PR Kitchen & Washroom Systems

83 Bangholme Rd, Dandenong South, Victoria 3175 Australia

Tel: +61 3 9700 9100 Fax: +61 3 9700 9191 Email: info@prks.com.au or service@prks.com.au

PR Kitchen & Washroom Systems NZ Ltd

P.O Box 53171, Auckland Airport, Auckland 2150

Tel: 09 964 0400 Fax: 09 964 0401 Email: info@prks.co.nz or service@prks.co.nz