

## Features & Benefits

<b>Quiet &amp; Efficient</b> Uses 85% less energy while producing 50% less noise thanks to brushless motor technology.	
<b>Auto Cooking Sensor</b> Detects when you are cooking and automatically turns on and off.	
<b>Dynamic LED Light</b> Lighting where the colour temperature can be adjusted from warm to cool.	
<b>LED Lighting</b> Long lasting and highly efficient providing full coverage across the cooking surface.	
<b>Neon Light</b> Make a bold visual statement in the kitchen with a colourful neon light.	
<b>Baffle Filters</b> Stainless steel baffle filters allowing a high rate of grease and moisture capture.	
<b>Metallic Grease Filter</b> Designed for optimal performance and collecting cooking grease, this filter can be washed in the dishwasher.	
<b>AirFalmec Filter</b> This specially designed filter improves performance of the hood, allowing quality extraction from all sides of the hood.	
<b>Flush Finish</b> Edge-to-edge beauty and flush finish look.	
<b>Touch Controls</b> Market leading control panel perfectly integrated into the hood to avoid grease and moisture build up.	
<b>Powerful Motor</b> Powerful motor made in Germany with a high level of performance and quality.	
<b>Slimline Controller</b> Clean and elegant, this slim controller is discreet, without sacrificing accessibility to the controls.	
<b>15 Minute Timer</b> Rangehood timer to ensure all vapour is completely removed from the kitchen after cooking is finished.	
<b>Scotch Brite</b> A special coating that protects the hood from corrosives and makes it fingerprint resistant.	
<b>Perimeter Extraction</b> Calculated placement over the metal filters ensures even extraction across any cooktop.	
<b>Q6 Ducting</b> Double, easy-to-install thickness aluminum gives our ducting extreme durability. 6 metre length.	
<b>NRS</b> Using innovative technology, these hoods make minimal noise without sacrificing power or performance.	
<b>E.ION</b> The only hoods on the market that sanitise the air. Watch the sensor change colour depending on the quality of the air.	
<b>Recirculating</b> Hoods that circulate and cleanse the air of impurities while in use.	
<b>Fasteel Finish</b> A stainless steel finish that is resistant to streaks and fingerprints, keeping the hood clean.	

## AUSTRALIA

PR Kitchen & Washroom Systems  
83 Bangholme Rd  
Dandenong South  
VIC 3175  
Australia  
Phone +61 3 9700 9100  
Fax +61 3 9700 9191  
Email info@prks.com.au

# falmec


# falmec

QUIET | POWERFUL | RANGEHOODS

## NEW ZEALAND

PR Kitchen & Washroom Systems NZ  
PO. Box 53171, Auckland Airport  
Auckland 2150  
New Zealand  
Phone 09 964 0400  
Fax 09 964 0401  
Email info@prks.co.nz

Printed June 2019

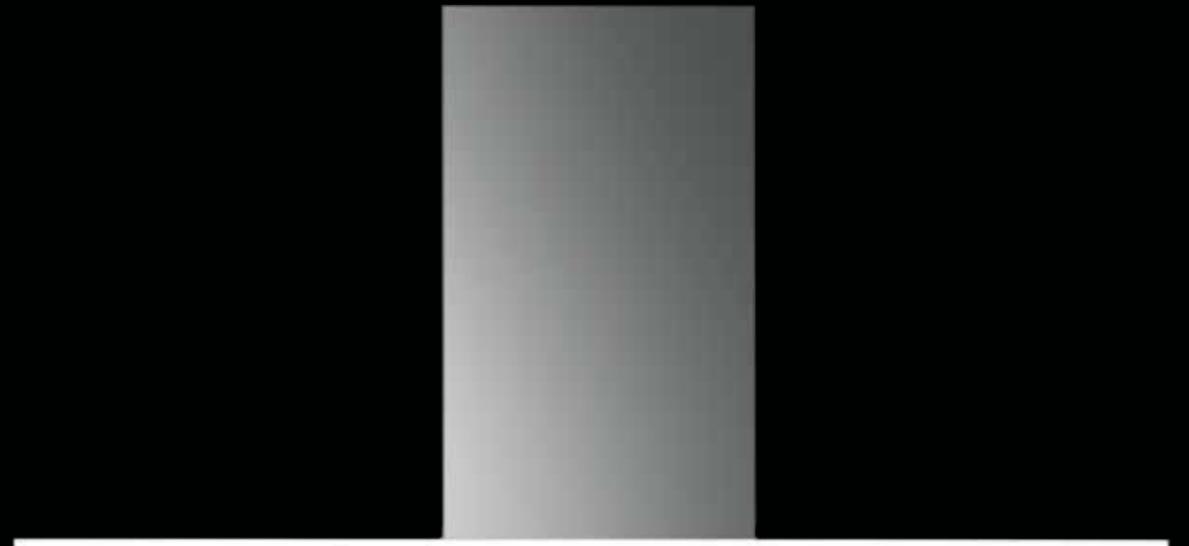

## Available Accessories

### External Installation Kit

Installation kit for external roof motor, tile or metal. Contains 2 rigid duct clamps, 2 threaded rods and 1 roof flashing.



### Q6 Duct Extension

This extension allows for extra length of the rangehood Q6 duct. The installation kit includes 6m of Q6 duct, ridge joiner and clamps.



### Roundback Draft Damper

The draft damper flap releases air from inside, while ensuring that wind and insects from outside aren't let in.



### Carbon.Zeo Filter

This filter removes unpleasant smells and odours, using the absorbing powers of activated charcoal and zeolite.



### Charcoal Filter

Eliminates odour and moisture and ensures clean air is re-circulated back into the kitchen.



### High Performance Charcoal Filter

Eliminates odour and moisture and ensures clean air is re-circulated back into the kitchen.



### Wireless Remote

RF remote control with the ability to control the fan speed, lighting and auto shut-off timer and is available as an optional accessory.



# falmec

QUIET | POWERFUL | RANGEHOODS



SCAN THIS CODE

to find our spec sheets, pricelist and catalogue online

# falmec

Over thirty-five years of experience and daily commitment in offering design, quality, attention to detail and the highest level of Italian manufacturing excellence.



# FAMILY INSPIRED

---



**A family, a group, which combines the experience and skills of different generations who apply their energy, creativity and intelligence every day to create products, solutions and real benefits to improve the quality of people's day-to-day lives.**

## Mission

Offer to our customers innovative products with a strong personal identity, featuring a unique and distinctive mix of design, technological performances and innovation.

Research of excellence, offering the best solution by proposing innovative and state of the art hoods in order to be a worldwide leader in the premium market.

## Vision

Ensuring the satisfaction of our customers needs no matter where in the world they are.

Creating products that, combining technological solutions with a taste of Italian tradition and creativity, improve the quality of air, well-being and life in customer houses.

## FALMEC'S PHILOSOPHY

---

- Specialist in kitchen hoods.
- Obsession for quality and continuous product quality improvement.
- Constant and solid growth, focused on Falmec brand with long term relations.



Why Falmec?	<b>6-7</b>
Benefits of choosing Falmec	<b>8-9</b>
New Falmec <sup>+</sup> range	<b>10-11</b>
Off board	<b>12-33</b>
On board	<b>34-53</b>
Motor solutions	<b>54-57</b>
Technical diagrams	<b>58-65</b>
Warranty	<b>67</b>
Rangehood checklist	<b>68-69</b>

# WHY FALMEC?

Founded in 1981, Falmec has evolved from a small manufacturing company to a leading force both in the national and international market, gaining extensive experience in the design and production of rangehoods.

With over 35 years experience in manufacturing premium rangehoods, Falmec has become an absolute leading international player in terms of quality, innovation, design and sustainability.



## Quiet

Falmec are bringing silence and performance back to the kitchen. By placing a powerful motor remotely, away from your kitchen, Falmec is able to achieve high performance with minimal noise. There's no need to pause the conversation with a Falmec hood.



## Powerful

Falmec rangehoods are designed to perform with maximum power and minimal noise. Every possible cooking style is considered with extraction rates ranging from 600m<sup>3</sup>/h to 2010m<sup>3</sup>/h.



## Innovation - E.ION®

The only hoods that sanitise the air. Falmec has developed a unique technology which, through Bipolar Controlled Ionisation, allows to recreate the air ions that not only eliminate unpleasant odours in a natural way but also to restore the optimal ionic balance, with considerable benefits to your physical and psychological well-being.

## Innovation - NRS®

Finally a hood that makes minimal noise. With the innovative technology Noise Reduction System (NRS®), Falmec has successfully created a product that combines high performance with significant comfort in the home. Beyond the figures certifying the excellent results achieved with scientific evidence, the other important fact to stress is that the hood is incredibly quiet.

# BENEFITS OF CHOOSING FALMEC



## Made In Italy

Designed and manufactured in the artistic and inspired city of Venice in Italy, Falmec utilizes the very latest in innovation, paired with unrivalled Italian design to give you the ultimate cooking experience.



## Rangehood Specialist

With over 35 years experience in manufacturing premium rangehoods, Falmec has become an absolute leading international player in terms of quality, innovation, design and sustainability.

## Global Brand

The best kitchens in the world have a new, intriguing and positive atmosphere, and it is all thanks to Falmec.

Falmec has become an international leader in terms of quality, innovation, design and sustainability.



## Excellent Customer Service

We are geared towards providing optimum customer service levels to trade and end users alike.

Our contact centre is open from 6:30am to 6:00pm AEST, operating out of Melbourne's South Eastern suburbs.




## Touch Control Panel

Our stylish, market leading control panel is perfectly integrated into the hood to avoid grease and moisture build up internally and keep your range hood performing at peak condition.

## Baffle Filters

Falmec's dishwasher-safe baffle filters allow significantly more airflow than traditional filters, while being a fraction of the noise which ensures that the performance of your hood is never compromised while exceeding expectations.

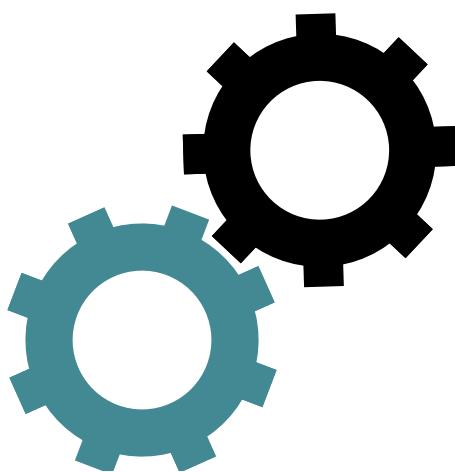

## Powerful Motor

Our powerful motors are engineered to the highest levels of performance, and are built to last. Being manufactured in Germany, attention to detail and quality are a key focus.



## 5 Years Warranty

All relationships are built on trust and we understand that trust must be earned, which is why we have persisted with our commitment to quality and the reason behind why each Falmec remote motor comes with an industry leading 5 year warranty on parts and labour and 10 years warranty on remote motors.

# INTRODUCING THE FALMEC<sup>+</sup> RANGE

---



**MILANO<sup>+</sup> RANGE**



**SIENA<sup>+</sup> RANGE**



**GENOVA<sup>+</sup> RANGE**



**TREVISO<sup>+</sup> RANGE**

## FEATURES

---



### Dynamic LED

A rangehood with lighting that adapts to its environment, the colour temperature can be altered to match that of its surroundings.



### Quiet & Efficient

Falmec introduces a new era of quietness and efficiency. Using 85% less energy, the rangehood also produces 50% less noise, so you can keep your kitchen conversations going.



### Auto Cooking Sensor

Intuition is important, and with Auto Sense, the rangehood turns itself on while you're cooking and off when you've finished.



### Flush Finish

With edge-to-edge beauty and flush installation, Falmec+ adds elegance, minimalism and sophistication to your kitchen.

\* Features vary depending on rangehood model







## **OFF BOARD MOTOR**

The motor is positioned externally to achieve a quiet and powerful cooking experience.

# CHOOSE YOUR HOOD IN 3 EASY STEPS

---

## 1 CHOOSE YOUR DESIGN

---



UNDERMOUNT



CANOPY

## 2 CHOOSE YOUR MOTOR

---

**MODERATE**

765m<sup>3</sup>/h

**HEAVY**

1140m<sup>3</sup>/h

**EXTREME**

2010m<sup>3</sup>/h

**MODERATE**

765m<sup>3</sup>/h

**HEAVY**

1140m<sup>3</sup>/h

**EXTREME**

2010m<sup>3</sup>/h

**MODERATE**

765m<sup>3</sup>/h

**HEAVY**

1140m<sup>3</sup>/h

**EXTREME**

2010m<sup>3</sup>/h

## 3 CHOOSE YOUR MOTOR POSITION

---



IN-ROOF



EXTERNAL ROOF



EXTERNAL WALL

# PRODUCT COLLECTION

 OFF BOARD  
MOTOR



MILANO<sup>+</sup> 60



MILANO<sup>+</sup> 90



MILANO<sup>+</sup> 90 DEEP



MILANO<sup>+</sup> 120 DEEP



GENOVA<sup>+</sup> 120



TREVIS<sup>+</sup> 90



ROMA 90



TRENTO 120



TRENTO 120 ISLAND



NUBE



NUVOLA 90



NUVOLA 140



ECLISSE



STELLA



DOWNDRAFT 90



DOWNDRAFT 120



## Features & Benefits

Dynamic LED <small>NEW</small>	Flush Finish <small>NEW</small>	Baffle Filters	Touch Controls	Powerful Motor	Slimline Controller	15 Minute Timer	Scotch Brite Finish	Q6 Ducting

## Product Information

- Product Dimensions (WxDxH): 560 x 280 x 366mm
- Ducting: 200mm circular outlet (6m of Q6 Duct supplied)
- Suitable for a 50 -75cm cooking surface
- Technical Diagram: **Page 59**


## Accessories

	= AVAILABLE	= INCLUDED

## Available Motor Speeds



## Ideal Cooking Style:

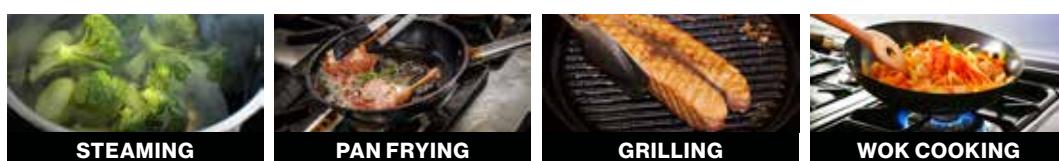

Model Code	Size	Motor Output	In-Roof	External Roof	External Wall	Finish
FP3ML60S2	60 cm	765 m³/h	✓	✓	✓	Stainless
FP3ML60S2	60 cm	1140 m³/h	✓	✓	✓	Stainless

Specification sheets available to download at prkws.com



## Features & Benefits

Dynamic LED <small>NEW</small>	Flush Finish <small>NEW</small>	Baffle Filters	Touch Controls	Powerful Motor	Slimline Controller	15 Minute Timer	Scotch Brite Finish	Q6 Ducting

## Product Information

- Product Dimensions (WxDxH) 870 x 280 x 366mm
- Ducting: 200mm circular outlet (6m of Q6 Duct supplied)
- Suitable for a 75-100cm cooking surface
- Technical Diagram: **Page 59**

## Accessories


External Installation Kit	Q6 Duct Extension	Roundback Draft Damper	Wireless Remote

= AVAILABLE    = INCLUDED

## Available Motor Speeds



## Ideal Cooking Style:

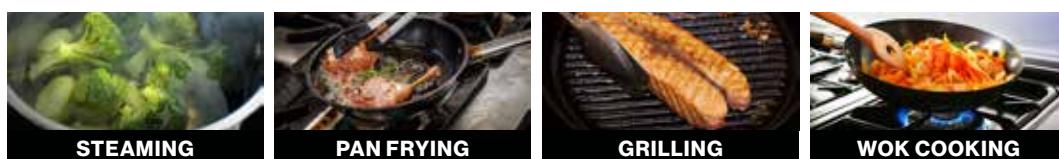

Model Code	Size	Motor Output	In-Roof	External Roof	External Wall	Finish
FP3ML90S2	90cm	765 m³/h	✓	✓	✓	Stainless
FP3ML90S2	90cm	1140 m³/h	✓	✓	✓	Stainless

Specification sheets available to download at prkws.com



## Features & Benefits



Auto-Cooking  
Sensor  
**NEW**



Dynamic LED  
**NEW**



Flush Finish  
**NEW**



Baffle  
Filters



Touch  
Controls



Powerful  
Motor



Slimline  
Controller



15 Minute  
Timer



Scotch Brite  
Finish



**Q6**  
Ducting

## Product Information

- Product Dimensions (WxDxH): 870 x 380 x 356mm
- Ducting: 200mm circular outlet (6m of Q6 Duct supplied)
- Suitable for a 75-100cm cooking surface
- Technical Diagram: **Page 59**

## Accessories

= AVAILABLE

= INCLUDED



External  
Installation Kit



Q6 Duct  
Extension



Roundback  
Draft Damper



Wireless  
Remote

## Available Motor Speeds

MODERATE

HEAVY

EXTREME

600m<sup>3</sup>/h    765m<sup>3</sup>/h    800m<sup>3</sup>/h    950m<sup>3</sup>/h    1000m<sup>3</sup>/h    **1140m<sup>3</sup>/h**    1300m<sup>3</sup>/h    1500m<sup>3</sup>/h    2010m<sup>3</sup>/h

## Ideal Cooking Style:



**STEAMING**



**PAN FRYING**



**GRILLING**



**BBQ**

Model Code	Size	Motor Output	In-Roof	External Roof	External Wall	Finish
FP3MLD90S2	90cm	1140 m <sup>3</sup> /h	✓	✓	✓	Stainless
FP3MLD90S2	90cm	2010 m <sup>3</sup> /h		✓	✓	Stainless

Specification sheets available to download at prkws.com

# MILANO<sup>+</sup> 120 DEEP

 OFF BOARD  
MOTOR



## Features & Benefits

Dynamic LED <small>NEW</small>	Flush Finish <small>NEW</small>	Baffle Filters	Touch Controls	Powerful Motor	Slimline Controller	15 Minute Timer	Scotch Brite Finish	Q6 Ducting

## Product Information

- Product Dimensions (WxDxH): 1160 x 380 x 356mm
- Ducting: 200mm circular outlet (6m of Q6 Duct supplied)
- Suitable for a 90-130cm cooking surface
- Technical Diagram: **Page 59**

## Accessories


= AVAILABLE    = INCLUDED

External Installation Kit	Q6 Duct Extension	Roundback Draft Damper	Wireless Remote

## Available Motor Speeds



## Ideal Cooking Style:

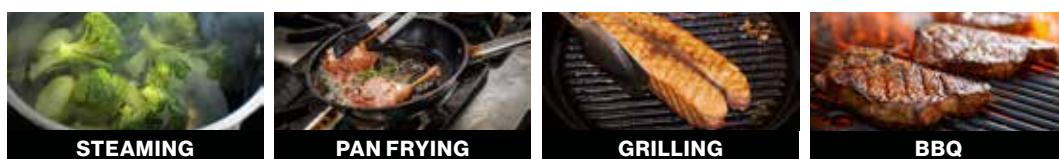


Model Code	Size	Motor Output	In-Roof	External Roof	External Wall	Finish
FP3MLD12S2	120cm	1140 m <sup>3</sup> /h	✓	✓	✓	Stainless
FP3MLD12S2	120cm	2010 m <sup>3</sup> /h		✓	✓	Stainless

Specification sheets available to download at prkws.com



## Features & Benefits

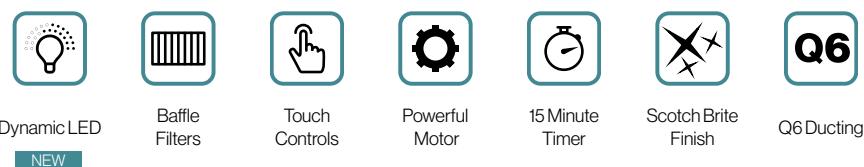

## Product Information

- Product Dimensions (WxDxH): 900 x 490 x 1080mm
- Ducting: 200mm circular outlet (6m of Q6 ducting supplied)
- Suitable for a 75-100cm cooking surface
- Technical Diagram: **Page 59**

## Accessories


= AVAILABLE      = INCLUDED



## Available Motor Speeds



## Ideal Cooking Style:

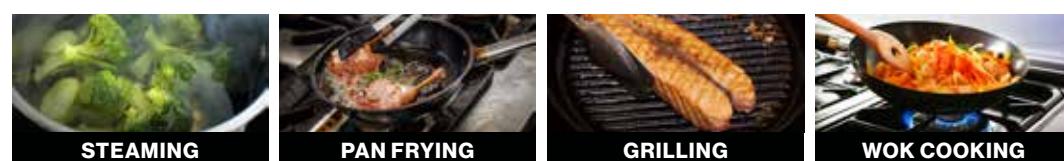

Model Code	Size	Motor Output	In-Roof	External Roof	External Wall	Finish
FP5TV90S2	90cm	765 m <sup>3</sup> /h	✓	✓	✓	Stainless
FP5TV90S2	90cm	1140 m <sup>3</sup> /h	✓	✓	✓	Stainless

Specification sheets available to download at prkws.com



## Features & Benefits




## Product Information

- Product Dimensions (WxDxH): 900 x 486 x1090mm
- Ducting: 200mm circular outlet (6m of Q6 Duct supplied)
- Suitable for a 75-100cm cooking surface
- Technical Diagram: **Page 59**

## Accessories

= AVAILABLE    = INCLUDED

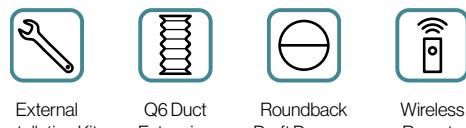


External Installation Kit    Q6 Duct Extension    Roundback Draft Damper    Wireless Remote

## Available Motor Speeds



## Ideal Cooking Style:

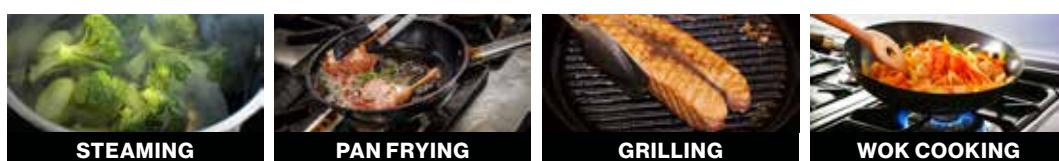

Model Code	Size	Motor Output	In-Roof	External Roof	External Wall	Finish
F5RM90B1	90cm	765 m³/h	✓	✓	✓	Black
F5RM90B1	90cm	1140 m³/h	✓	✓	✓	Black



## Features & Benefits



Dynamic LED

**NEW**



Flush Finish

**NEW**



Baffle  
Filters



Touch  
Controls



Powerful  
Motor



Slimline  
Controller



15 Minute  
Timer



Scotch Brite  
Finish



Q6 Ducting

## Product Information

## Accessories

= AVAILABLE

= INCLUDED

- Product Dimensions(WxDxH): 1160 x 470 x 332mm
- Ducting: 200mm circular outlet (6m of Q6 Duct supplied)
- Suitable for a 90-130cm cooking surface
- Technical Diagram: **Page 60**



External  
Installation Kit



Q6 Duct  
Extension



Roundback  
Draft Damper



Wireless  
Remote

## Available Motor Speeds

MODERATE

HEAVY

EXTREME

600m<sup>3</sup>/h

765m<sup>3</sup>/h

800m<sup>3</sup>/h

950m<sup>3</sup>/h

1000m<sup>3</sup>/h

1140m<sup>3</sup>/h

1300m<sup>3</sup>/h

1500m<sup>3</sup>/h

2010m<sup>3</sup>/h

## Ideal Cooking Style:



STEAMING



PAN FRYING



GRILLING



WOK COOKING



BBQ

Model Code	Size	Motor Output	In-Roof	External Roof	External Wall	Finish
FP3GV12S2	120cm	2010 m <sup>3</sup> /h		✓	✓	Stainless

Specification sheets available to download at prkws.com

# TRENTO 120

OFF BOARD  
MOTOR



## Features & Benefits




## Product Information

- Product Dimensions (WxDxH): 1200 x 800 x 1100mm
- Ducting: 200mm circular outlet (5m of Q6 Duct supplied)
- Suitable for a 90-130cm cooking surface
- Technical Diagram: **Page 60**

## Accessories

  = AVAILABLE        = INCLUDED



## Available Motor Speeds



## Ideal Cooking Style:



Model Code	Size	Motor Output	In-Roof	External Roof	External Wall	Finish
F5TN12S1	120cm	2010 m³/h		✓	✓	Stainless

Specification sheets available to download at prkws.com

# TRENTO 120 ISLAND

OFF BOARD  
MOTOR



## Features & Benefits

LED Lighting	Baffle Filters	Touch Controls	Powerful Motor	15 Minute Timer	Scotch Brite Finish	Q6 Ducting

## Product Information


- Product Dimensions (WxDxH): 1200 x 600 x 1290mm
- Ducting: 200mm circular outlet (6m of Q6 Duct supplied)
- Suitable for a 90-130cm cooking surface
- Technical Diagram: **Page 60**

## Accessories

= AVAILABLE    = INCLUDED

External Installation Kit	Q6 Duct Extension	Roundback Draft Damper	Wireless Remote

## Available Motor Speeds



## Ideal Cooking Style:



Model Code	Size	Motor Output	In-Roof	External Roof	External Wall	Finish
F7TN12S1	120cm	2010 m³/h		✓	✓	Stainless

Specification sheets available to download at prkws.com



# Ceiling Cassette

**An exclusive collection created in partnership with emerging and professional designers**

Hidden away, a ceiling cassette provides a clean, minimalistic look to your kitchen. It targets odour and grease towards the perimeter of the cassette, which creates an increase in air flow.

With the added benefit of a 15 minute timer and a remote control included, the ceiling cassette ensures all food odours and grease are removed effectively from the kitchen.



Minimum distance of rangehood from cooktop must be 150cm

## Features & Benefits

					
Metallic Grease Filter	Powerful Motor	15 Minute Timer	Scotch Brite Finish	Q6 Ducting	Perimeter Extraction

## Product Information

## Accessories

 = AVAILABLE     = INCLUDED

- Product Dimensions (WxDxH): Refer to table
- Ducting: 200mm circular outlet (6m of Q6 Duct supplied)
- Suitable for a 75-150cm cooking surface
- Technical Diagram: **Page 60**



Wireless  
Remote

## Available Motor Speeds

MODERATE

HEAVY

EXTREME

600m<sup>3</sup>/h    765m<sup>3</sup>/h    800m<sup>3</sup>/h    950m<sup>3</sup>/h    1000m<sup>3</sup>/h    1140m<sup>3</sup>/h    **1300m<sup>3</sup>/h**    **1500m<sup>3</sup>/h**    2010m<sup>3</sup>/h

## Ideal Cooking Style:



STEAMING



PAN FRYING



GRILLING



WOK COOKING


Model Code	Size	Motor Output	In-Roof	External Roof	External Wall	Finish
F9NB90S1	90cm	1300 m <sup>3</sup> /h	✓			Stainless
F9NB90S1	90cm	1500 m <sup>3</sup> /h			✓	Stainless
F9NB14S1	140cm	1300 m <sup>3</sup> /h	✓			Stainless
F9NB14S1	140cm	1500 m <sup>3</sup> /h			✓	Stainless

Specification sheets available to download at prkws.com



Minimum distance of rangehood from cooktop must be 150cm

## Features & Benefits



## Product Information

- Product Dimensions: Refer to table below
- Ducting: 200mm circular outlet (6m of Q6 Duct supplied)
- Suitable for a 75-100cm cooking surface
- Technical Diagram: **Page 60**

## Accessories

= AVAILABLE    = INCLUDED




Wireless  
Remote

## Available Motor Speeds



## Ideal Cooking Style:

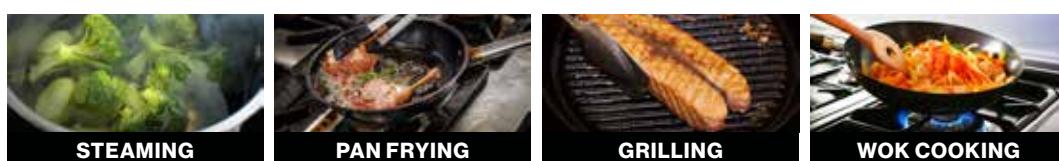


Model Code	Size	Motor Output	In-Roof	External Roof	External Wall	Finish
F9NV90S1	90cm	1300 m³/h	✓			Stainless
F9NV90S1	90cm	1500 m³/h			✓	Stainless
F9NV90W1	90cm	1300 m³/h	✓			White
F9NV90W1	90cm	1500 m³/h			✓	White

Specification sheets available to download at prkws.com



Minimum distance of rangehood from cooktop must be 150cm

## Features & Benefits



## Product Information

- Product Dimensions: Refer to table below
- Ducting: 200mm circular outlet (6m of Q6 Duct supplied)
- Suitable for a 90-150cm cooking surface
- Technical Diagram: **Page 60**

## Accessories

= AVAILABLE    = INCLUDED



Wireless  
Remote

## Available Motor Speeds

MODERATE

HEAVY

EXTREME

600m<sup>3</sup>/h    765m<sup>3</sup>/h    800m<sup>3</sup>/h    950m<sup>3</sup>/h    1000m<sup>3</sup>/h    1140m<sup>3</sup>/h    **1300m<sup>3</sup>/h**    **1500m<sup>3</sup>/h**    2010m<sup>3</sup>/h

## Ideal Cooking Style:



STEAMING



PAN FRYING



GRILLING



WOK COOKING

Model Code	Size	Motor Output	In-Roof	External Roof	External Wall	Finish
F9NV14S1	140cm	1300 m <sup>3</sup> /h	✓			Stainless
F9NV14S1	140cm	1500 m <sup>3</sup> /h			✓	Stainless
F9NV14W1	140cm	1300 m <sup>3</sup> /h	✓			White
F9NV14W1	140cm	1500 m <sup>3</sup> /h			✓	White

Specification sheets available to download at prkws.com



Minimum distance of rangehood from cooktop must be 150cm

## Features & Benefits



Neon Lighting

Metallic Grease Filter

15 Minute Timer

Scotch Bright Finish

**Q6**

Perimeter Extraction

## Product Information

## Accessories

 = AVAILABLE

 = INCLUDED

- Product Dimensions: Refer to Table Below
- Ducting: 200mm circular outlet (6m of Q6 Duct supplied)
- Suitable for a 90-130cm cooking surface
- Technical Diagram: **Page 61**



Wireless Remote

## Available Motor Speeds

MODERATE

HEAVY

EXTREME

600m<sup>3</sup>/h

765m<sup>3</sup>/h

800m<sup>3</sup>/h

950m<sup>3</sup>/h

1000m<sup>3</sup>/h

1140m<sup>3</sup>/h

1300m<sup>3</sup>/h

1500m<sup>3</sup>/h

2010m<sup>3</sup>/h

## Ideal Cooking Style:



STEAMING



PAN FRYING



GRILLING




WOK COOKING

Model Code	Size	Motor Output	In-Roof	External Roof	External Wall	Finish
F9ES12W1 ▲	120cm	1300 m <sup>3</sup> /h	✓			White
F9ES12W1 ▲	120cm	1500m <sup>3</sup> /h			✓	White



Minimum distance of rangehood from cooktop must be 150cm

## Features & Benefits

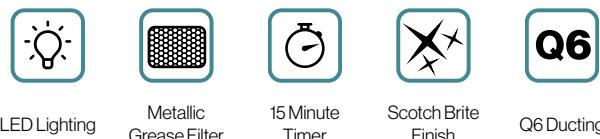

LED Lighting      Metallic Grease Filter      15 Minute Timer      Scotch Bright Finish      Q6 Ducting

## Product Information

- Product Dimensions: Refer to table below
- Ducting: 200mm circular outlet (6m of Q6 Duct supplied)
- Suitable for a 90-120cm cooking surface
- Technical Diagram: **Page 61**

## Accessories

= AVAILABLE    = INCLUDED



Wireless Remote

## Available Motor Speeds

MODERATE

HEAVY

EXTREME

600m<sup>3</sup>/h    765m<sup>3</sup>/h    800m<sup>3</sup>/h    950m<sup>3</sup>/h    1000m<sup>3</sup>/h    1140m<sup>3</sup>/h    **1300m<sup>3</sup>/h**    **1500m<sup>3</sup>/h**    2010m<sup>3</sup>/h

## Ideal Cooking Style:



STEAMING



PAN FRYING



GRILLING



WOK COOKING

Model Code	Size	Motor Output	In-Roof	External Roof	External Wall	Finish
F9ST90S1 / W1	90cm	1300 m <sup>3</sup> /h	✓			Stainless/White
F9ST90S1 / W1	90cm	1500 m <sup>3</sup> /h		✓		Stainless/White
F9ST12S1 ▲	90cm	1300 m <sup>3</sup> /h	✓			Stainless
F9ST12S1 ▲	90cm	1500 m <sup>3</sup> /h		✓		Stainless



# Downdraft

## Minimalistic design at its finest


The Falmec Downdraft extracts odours and grease and pushes them downward out through the duct. The Downdraft is invisible and is hidden behind the cooktop except when in use. A simple touch of a button makes the vent rise and fall. This gives a sleek and minimalist look in your kitchen.

# DOWNDRAFT 90

 OFF BOARD  
MOTOR



## Features & Benefits

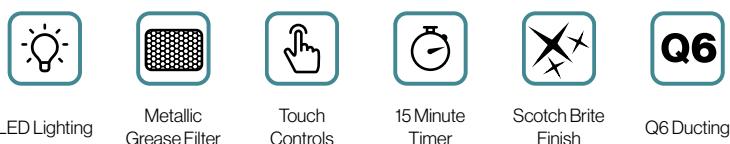

LED Lighting

Metallic Grease Filter

Touch Controls

15 Minute Timer

Scotch Brite Finish

Q6 Ducting

## Product Information

## Accessories

 = AVAILABLE

 = INCLUDED

- Product Dimensions: Refer to table below
- Ducting: 200mm circular outlet (6m of Q6 Duct supplied)
- Suitable for a 50-90cm cooking surface
- Technical Diagram: **Page 61**



Carbon.Zeo  
Filter

## Available Motor Speeds

MODERATE

HEAVY

EXTREME

600m<sup>3</sup>/h

765m<sup>3</sup>/h

800m<sup>3</sup>/h

950m<sup>3</sup>/h

1000m<sup>3</sup>/h

1140m<sup>3</sup>/h

1300m<sup>3</sup>/h

1500m<sup>3</sup>/h

2010m<sup>3</sup>/h

## Ideal Cooking Style:



STEAMING



PAN FRYING



GRILLING



WOK COOKING

Model Code	Size	Motor Output	Inline Extraction	Wall Extraction	Recirculation Extraction	Finish
F8DD90B1 / S1 ▲	90cm	600 m <sup>3</sup> /h			✓	Black/Stainless
F8DD90B1 / S1 ▲	90cm	950 m <sup>3</sup> /h	✓			Black/Stainless
F8DD90B1 / S1 ▲	90cm	1000 m <sup>3</sup> /h		✓		Black/Stainless
F8DD90B1 / S1 ▲	90cm	1300 m <sup>3</sup> /h	✓			Black/Stainless

# DOWNDRAFT 120



OFF BOARD  
MOTOR



## Features & Benefits



LED Lighting

Metallic Grease Filter

Touch Controls

15 Minute Timer

Scotch Brite Finish

Q6

## Product Information

## Accessories

= AVAILABLE

= INCLUDED

- Product Dimensions: Refer to table below
- Ducting: 200mm circular outlet (6m of Q6 duct supplied)
- Suitable for a 75-100cm cooking surface
- Technical Diagram: **Page 61**



Carbon.Zeo  
Filter

## Available Motor Speeds

MODERATE

HEAVY

EXTREME

600m<sup>3</sup>/h

765m<sup>3</sup>/h

800m<sup>3</sup>/h

950m<sup>3</sup>/h

1000m<sup>3</sup>/h

1140m<sup>3</sup>/h

1300m<sup>3</sup>/h

1500m<sup>3</sup>/h

2010m<sup>3</sup>/h

## Ideal Cooking Style:



STEAMING



PAN FRYING



GRILLING



WOK COOKING

Model Code	Size	Motor Output	Inline Extraction	Wall Extraction	Recirculation Extraction	Finish
F8DD12B1 / S1 ▲	120cm	600 m <sup>3</sup> /h			✓	Black/Stainless
F8DD12B1 / S1 ▲	120cm	950 m <sup>3</sup> /h	✓			Black/Stainless
F8DD12B1 / S1 ▲	120cm	1000 m <sup>3</sup> /h		✓		Black/Stainless
F8DD12B1 / S1 ▲	120cm	1300 m <sup>3</sup> /h	✓			Black/Stainless



**ON BOARD  
MOTOR**



## E.ion® System

### **E.ION SYSTEM®**

The only hoods that sanitise the air. Falmec has developed a unique technology which, through BIPOLAR CONTROLLED IONISATION, allows to recreate the air ions that not only eliminate unpleasant odours in a natural way but also to restore the optimal ionic balance, with considerable benefits to your physical and psychological well-being.



### **NRS SILENCE®**

Finally a hood that makes minimal noise. With the innovative technology NRS®, Falmec has successfully created a product that combines high performance with significant comfort in the home. Beyond the figures certifying the excellent results achieved with scientific evidence, the other important fact to stress is that the hood is incredibly quiet.

# PRODUCT COLLECTION

 ON BOARD  
MOTOR



SIENA<sup>+</sup> 60



SIENA<sup>+</sup> 90



SIENA<sup>+</sup> 90 DEEP



GRUPPO INCASSO



GRUPPO INCASSO PRO



GRUPPO INCASSO NRS®



LUMINA NRS® WALL



LUMINA NRS® ISLAND



PLANE TOP



LUCE WALL



LUCE ISLAND



LUMEN



POLAR ISLAND



POLAR WALL



SPRING E.ION®



MOVE



## Features & Benefits



Quiet &  
Efficient  
**NEW**



Dynamic LED  
**NEW**



Flush Finish  
**NEW**



Baffle  
Filters



Touch  
Controls



Slimline  
Controller



15 Minute  
Timer



Scotch Brite  
Finish

## Product Information

## Accessories

= AVAILABLE    = INCLUDED

- Product Dimensions (WxDxH): 560 x 280 x 363mm
- Ducting: 150mm circular outlet
- Suitable for a 50-75cm cooking surface
- Technical Diagram: **Page 61**



Wireless  
Remote

## Available Motor Speeds

MODERATE

HEAVY

EXTREME

600m<sup>3</sup>/h    765m<sup>3</sup>/h    800m<sup>3</sup>/h    **950m<sup>3</sup>/h**    1000m<sup>3</sup>/h    1140m<sup>3</sup>/h    1300m<sup>3</sup>/h    1500m<sup>3</sup>/h    2010m<sup>3</sup>/h

## Ideal Cooking Style:



**STEAMING**



**PAN FRYING**



**GRILLING**

Model Code	Size	Motor Output	Installation Option	Finish
FP3SN60S2	60cm	950m <sup>3</sup> /h	Top Ducted	Stainless

Specification sheets available to download at prkws.com



## Features & Benefits



Quiet &  
Efficient  
**NEW**



Dynamic LED  
**NEW**



Flush Finish  
**NEW**



Baffle  
Filters



Touch  
Controls



Slimline  
Controller



15 Minute  
Timer



Scotch Brite  
Finish

## Product Information

## Accessories

= AVAILABLE    = INCLUDED

- Product Dimensions (WxDxH): 870 x 280 x 363mm
- Ducting: 150mm circular outlet
- Suitable for a 75-100cm cooking surface
- Technical Diagram: **Page 61**



Wireless  
Remote

## Available Motor Speeds

MODERATE

HEAVY

EXTREME

600m<sup>3</sup>/h    765m<sup>3</sup>/h    800m<sup>3</sup>/h    **950m<sup>3</sup>/h**    1000m<sup>3</sup>/h    1140m<sup>3</sup>/h    1300m<sup>3</sup>/h    1500m<sup>3</sup>/h    2010m<sup>3</sup>/h

## Ideal Cooking Style:



**STEAMING**



**PAN FRYING**



**GRILLING**

Model Code	Size	Motor Output	Installation Option	Finish
FP3SN90S2	90cm	950 m <sup>3</sup> /h	Top Ducted	Stainless

Specification sheets available to download at prkws.com



## Features & Benefits

Quiet & Efficient <small>NEW</small>	Dynamic LED <small>NEW</small>	Flush Finish <small>NEW</small>	Baffle Filters	Touch Controls	Slimline Controller	15 Minute Timer	Scotch Brite Finish

## Product Information

- Product Dimensions (WxDxH): 870 x 380 x 363mm
- Ducting: 150mm circular outlet
- Suitable for a 75-100cm cooking surface
- Extra depth increases capture area, perfect for large cooktops
- Technical Diagram: [Page 62](#)

## Accessories

= AVAILABLE    = INCLUDED



Wireless Remote

## Available Motor Speeds



## Ideal Cooking Style:



Model Code	Size	Motor Output	Installation Option	Finish
FP3SND90S2	90cm	950 m³/h	Top Ducted	Stainless

Specification sheets available to download at [prkws.com](http://prkws.com)



## Features & Benefits



Dynamic LED    Flush Finish    15 Minute Timer

Scotch Bright Finish

Perimeter Extraction

## Product Information

- Product Dimensions: Refer to table
- Ducting: 150mm circular outlet
- Suitable for a 50-90cm cooking surface
- Technical Diagram: **Page 62**

## Accessories

= AVAILABLE    = INCLUDED



Wireless Remote    Charcoal Filter

\*Recirculation option available

## Available Motor Speeds

MODERATE

HEAVY

EXTREME

600m<sup>3</sup>/h    765m<sup>3</sup>/h    800m<sup>3</sup>/h    950m<sup>3</sup>/h    1000m<sup>3</sup>/h    1140m<sup>3</sup>/h    1300m<sup>3</sup>/h    1500m<sup>3</sup>/h    2010m<sup>3</sup>/h

## Ideal Cooking Style:



STEAMING



PAN FRYING



GRILLING

Model Code	Size	Hood Mounting	Motor Output	Lighting	Finish
F3GI60S1	60cm	Built-In	800 m <sup>3</sup> /h	LED 2 x1.2W (3200 K)	Stainless
F3GI80S1	80cm	Built-In	800 m <sup>3</sup> /h	LED 2 x1.2W (3200 K)	Stainless
F3GI10S1	105cm	Built-In	800 m <sup>3</sup> /h	LED 2 x1.2W (3200 K)	Stainless

Specification sheets available to download at prkws.com



## Features & Benefits



Dynamic LED

Baffle Filters

Flush Finish

15 Minute Timer

Scotch Bright Finish

## Product Information

- Product Dimensions(WxDxH): 810 x 280 x 328mm
- Ducting: 150mm circular outlet
- Suitable for a 50-90cm cooking surface
- Technical Diagram: **Page 62**

## Accessories

= AVAILABLE    = INCLUDED



Wireless Remote

## Available Motor Speeds

MODERATE

HEAVY

EXTREME

600m <sup>3</sup> /h	765m <sup>3</sup> /h	800m <sup>3</sup> /h	<b>950m<sup>3</sup>/h</b>	1000m <sup>3</sup> /h	1140m <sup>3</sup> /h	1300m <sup>3</sup> /h	1500m <sup>3</sup> /h	2010m <sup>3</sup> /h
----------------------	----------------------	----------------------	---------------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------

## Ideal Cooking Style:



STEAMING



PAN FRYING



GRILLING

Model Code	Size	Hood Mounting	Motor Output	Lighting	Finish
F3GP80S1	80cm	Built-In	950 m <sup>3</sup> /h	LED 2 x1.2W (3200 K)	Stainless

Specification sheets available to download at [prkws.com](http://prkws.com)



## Features & Benefits



## Product Information

- Product Dimensions: Refer to table below
- Ducting: 150mm circular outlet (700mm insulated rigid duct and elbow included)
- Operates at 42db on speed 3
- Suitable for a 50-90cm cooking surface
- Technical Diagram: **Page 62**

## Accessories

= AVAILABLE    = INCLUDED



High  
Performance  
Charcoal Filter



Wireless  
Remote

\*Recirculation option available

## Available Motor Speeds

MODERATE

HEAVY

EXTREME

600m<sup>3</sup>/h 765m<sup>3</sup>/h 800m<sup>3</sup>/h 950m<sup>3</sup>/h 1000m<sup>3</sup>/h 1140m<sup>3</sup>/h 1300m<sup>3</sup>/h 1500m<sup>3</sup>/h 2010m<sup>3</sup>/h

## Ideal Cooking Style:



STEAMING



PAN FRYING



GRILLING

Model Code	Size	Hood Mounting	Motor Output	Lighting	Finish
F3GN60S1	60cm	Built-In	800 m <sup>3</sup> /h	LED 2 x1.2W (3200 K)	Stainless
F3GN80S1	80cm	Built-In	800 m <sup>3</sup> /h	LED 2 x1.2W (3200 K)	Stainless

Specification sheets available to download at prkws.com

# LUMINA NRS® WALL



ON BOARD  
MOTOR



## Features & Benefits



## Product Information

- Product Dimensions: Refer to table below
- Ducting: 150mm circular outlet (700mm insulated rigid ducting and elbow included)
- Operates at 42db on speed 3
- Suitable for a 50-90cm cooking surface
- Technical Diagram: **Page 62**

## Accessories

= AVAILABLE     = INCLUDED



High  
Performance  
Charcoal Filter

\*Recirculation option available

## Available Motor Speeds

MODERATE

HEAVY

EXTREME

600m<sup>3</sup>/h    765m<sup>3</sup>/h    800m<sup>3</sup>/h    950m<sup>3</sup>/h    1000m<sup>3</sup>/h    1140m<sup>3</sup>/h    1300m<sup>3</sup>/h    1500m<sup>3</sup>/h    2010m<sup>3</sup>/h

## Ideal Cooking Style:



STEAMING



PAN FRYING



GRILLING

Model Code	Size	Hood Mounting	Motor Output	Lighting	Finish
F5LA90B1/ S1 / W1 ▲	90cm	Wall	800 m <sup>3</sup> /h	Neon 1 x 21 W	Black/Stainless/White
F5LA12B1 ▲ /S1 ▲ /W1 ▲	120cm	Wall	800 m <sup>3</sup> /h	Neon 1 x 21 W	Black/Stainless/White

▲ Special Order 10-12-weeks

Specification sheets available to download at prkws.com

# LUMINA NRS® ISLAND



ON BOARD  
MOTOR



## Features & Benefits



Neon Lighting

Touch Controls

15 Minute  
Timer

Scotch Bright  
Finish

NRS

Perimeter  
Extraction

## Product Information

- Product Dimensions (WxDxH): 900 x 585 x 1230
- Ducting: 150mm circular outlet (700mm insulated rigid ducting and elbow included)
- Operates at 42db on speed 3
- Suitable for a 50-90cm cooking surface
- Technical Diagram: **Page 62**

## Accessories

= AVAILABLE

= INCLUDED



High  
Performance  
Charcoal Filter

\*Recirculation option available

## Available Motor Speeds

MODERATE

HEAVY

EXTREME

600m<sup>3</sup>/h 765m<sup>3</sup>/h 800m<sup>3</sup>/h 950m<sup>3</sup>/h 1000m<sup>3</sup>/h 1140m<sup>3</sup>/h 1300m<sup>3</sup>/h 1500m<sup>3</sup>/h 2010m<sup>3</sup>/h

## Ideal Cooking Style:



STEAMING



PAN FRYING



GRILLING

Model Code	Size	Hood Mounting	Motor Output	Lighting	Finish
F7LA90B1	90cm	Island	800 m <sup>3</sup> /h	Neon 1 x 21 W	Black

Specification sheets available to download at prkws.com

# PLANE NRS® WALL

ON BOARD  
MOTOR



## Features & Benefits



## Product Information

- Product Dimensions: Refer to table below
- Ducting: 150mm circular outlet (700mm insulated rigid duct and elbow included)
- Operates at 42db on speed 3
- Suitable for a 50-90cm cooking surface
- Technical Diagram: **Page 63**

## Accessories

= AVAILABLE     = INCLUDED



High  
Performance  
Charcoal Filter

\*Recirculation option available

## Available Motor Speeds

MODERATE

HEAVY

EXTREME

600m<sup>3</sup>/h 765m<sup>3</sup>/h 800m<sup>3</sup>/h 950m<sup>3</sup>/h 1000m<sup>3</sup>/h 1140m<sup>3</sup>/h 1300m<sup>3</sup>/h 1500m<sup>3</sup>/h 2010m<sup>3</sup>/h

## Ideal Cooking Style:



STEAMING



PAN FRYING



GRILLING

Model Code	Size	Hood Mounting	Motor Output	Lighting	Finish
F5PN90S1	90cm	Wall	800 m <sup>3</sup> /h	LED 2 x1.2W (3200 K)	Stainless
F5PN12S1 ▲	120cm	Wall	800 m <sup>3</sup> /h	LED 3 x1.2W (3200 K)	Stainless

▲ Special Order 10-12-weeks

Specification sheets available to download at prkws.com

# PLANE NRS® ISLAND

ON BOARD  
MOTOR



## Features & Benefits



## Product Information

- Product Dimensions: Refer to table below
- Ducting: 150mm circular outlet (700mm insulated rigid duct and elbow included)
- Operated at 42db on speed 3
- Suitable for a 50-90cm cooking surface
- Technical Diagram: **Page 63**

## Accessories

= AVAILABLE     = INCLUDED



High  
Performance  
Charcoal Filter

\*Recirculation option available

## Available Motor Speeds



## Ideal Cooking Style:



STEAMING



PAN FRYING



GRILLING

Model Code	Size	Hood Mounting	Motor Output	Lighting	Finish
F7PN90S1	90cm	Island	800 m³/h	LED 4 x1.2W (3200 K)	Stainless
F7PN12S1 ▲	120cm	Island	800 m³/h	LED 4 x1.2W (3200 K)	Stainless

▲ Special Order 10-12-weeks

Specification sheets available to download at prkws.com

# PLANE TOP

 ON BOARD  
MOTOR



## Features & Benefits



LED Lighting

15 Minute  
Timer

Scotch Bright  
Finish

Perimeter  
Extraction

Fasteel  
Finish

## Product Information

- Product Dimensions: Refer to table below
- Ducting: 150mm circular outlet
- Suitable for a 50-90cm cooking surface
- Technical Diagram: **Page 63**

## Accessories

 = AVAILABLE     = INCLUDED



Charcoal Filter

\*Recirculation option available

## Available Motor Speeds

MODERATE

HEAVY

EXTREME

600m<sup>3</sup>/h 765m<sup>3</sup>/h 800m<sup>3</sup>/h 950m<sup>3</sup>/h 1000m<sup>3</sup>/h 1140m<sup>3</sup>/h 1300m<sup>3</sup>/h 1500m<sup>3</sup>/h 2010m<sup>3</sup>/h

## Ideal Cooking Style:



STEAMING



PAN FRYING



GRILLING

Model Code	Size	Hood Mounting	Motor Output	Lighting	Finish
F5PT90S1	90cm	Wall	800m <sup>3</sup> /h	LED 2 x1.2W (3200 K)	Fasteel
F5PT12S1 ▲	120cm	Wall	800m <sup>3</sup> /h	LED 3 x1.2W (3200 K)	Fasteel
F7PT90S1 ▲	90cm	Island	800m <sup>3</sup> /h	LED 4 x1.2W (3200 K)	Fasteel

▲ Special Order 10-12-weeks

Specification sheets available to download at prkws.com



## Features & Benefits



Neon Lighting      AirFalmec Filter      Touch Controls      15 Minute Timer      Scotch Brite Finish

## Product Information

- Product Dimensions: Refer to table below
- Ducting: 150mm circular outlet
- Suitable for a 50-90cm cooking surface
- Technical Diagram: **Page 63**

## Accessories

= AVAILABLE    = INCLUDED



Charcoal Filter

*\*Recirculation option available*

## Available Motor Speeds



## Ideal Cooking Style:



Model Code	Size	Hood Mounting	Motor Output	Lighting	Finish
F5LC90B1	90cm	Wall	800 m <sup>3</sup> /h	Neon 1 x 21 W	Black





## Features & Benefits



Neon Lighting



15 Minute  
Timer



Scotch Brite  
Finish

## Product Information

- Product Dimensions: Refer to table below
- Ducting: 150mm circular outlet
- Suitable for a 50-90cm cooking surface
- Technical Diagram: **Page 63**

## Accessories

= AVAILABLE

= INCLUDED



Charcoal Filter

*\*Recirculation option available*

## Available Motor Speeds

MODERATE

HEAVY

EXTREME

600m<sup>3</sup>/h    765m<sup>3</sup>/h    **800m<sup>3</sup>/h**    950m<sup>3</sup>/h    1000m<sup>3</sup>/h    1140m<sup>3</sup>/h    1300m<sup>3</sup>/h    1500m<sup>3</sup>/h    2010m<sup>3</sup>/h

## Ideal Cooking Style:



STEAMING



PAN FRYING



GRILLING

Model Code	Size	Hood Mounting	Motor Output	Lighting	Finish
F5LM60S1	60cm	Wall	800m <sup>3</sup> /h	Neon 1 x 13 W	Stainless
F5LM90S1	90cm	Wall	800m <sup>3</sup> /h	Neon 1 x 13 W	Stainless
F5LM12S1 ▲	120cm	Wall	800m <sup>3</sup> /h	Neon 1 x 13 W	Stainless
F7LM90S1 ▲	90cm	Island	800m <sup>3</sup> /h	Neon 1 x 13 W	Stainless
F7LM12S1 ▲	120cm	Island	800m <sup>3</sup> /h	Neon 1 x 13 W	Stainless



## Features & Benefits



LED Lighting



15 Minute  
Timer

## Product Information

- Product Dimensions (WxDxH): ø 350 x 930mm
- Ducting: 150mm circular outlet
- Suitable for a 60cm cooking surface
- Technical Diagram: **Page 64**

## Accessories

 = AVAILABLE     = INCLUDED



Charcoal Filter

*\*Recirculation option available*

## Available Motor Speeds

MODERATE

HEAVY

EXTREME

600m<sup>3</sup>/h 765m<sup>3</sup>/h 800m<sup>3</sup>/h 950m<sup>3</sup>/h 1000m<sup>3</sup>/h 1140m<sup>3</sup>/h 1300m<sup>3</sup>/h 1500m<sup>3</sup>/h 2010m<sup>3</sup>/h

## Ideal Cooking Style:



STEAMING



PAN FRYING



GRILLING

Model Code	Size	Hood Mounting	Motor Output	Lighting	Finish
F7PR35B1	35cm	Island	800 m <sup>3</sup> /h	LED 3 x1.2W (3200 K)	Black
F7PR35W1 ▲	35cm	Island	800 m <sup>3</sup> /h	LED 3 x1.2W (3200 K)	White



## Features & Benefits



LED Lighting



15 Minute Timer

## Product Information

- Product Dimensions (WxDxH): Ø350 x 930mm
- Ducting: 150mm circular outlet
- Suitable for a 60cm cooking surface
- Technical Diagram: **Page 64**

## Accessories

= AVAILABLE    = INCLUDED



Charcoal Filter

*\*Recirculation option available*

## Available Motor Speeds


MODERATE

HEAVY

EXTREME

600m<sup>3</sup>/h 765m<sup>3</sup>/h 800m<sup>3</sup>/h 950m<sup>3</sup>/h 1000m<sup>3</sup>/h 1140m<sup>3</sup>/h 1300m<sup>3</sup>/h 1500m<sup>3</sup>/h 2010m<sup>3</sup>/h

## Ideal Cooking Style:



STEAMING



PAN FRYING



GRILLING

Model Code	Size	Hood Mounting	Motor Output	Lighting	Finish
F5PR35B1 ▲	35cm	Wall	800 m <sup>3</sup> /h	LED 3 x1.2W (3200 K)	Black
F5PR35W1 ▲	35cm	Wall	800 m <sup>3</sup> /h	LED 3 x1.2W (3200 K)	White

E.ion®System 



## Features & Benefits

	Neon Lighting		Metallic Grease Filter		Touch Controls		15 Minute Timer		Scotch Brite Finish		E.ION		Recirculating
---	---------------	---	------------------------	---	----------------	---	-----------------	---	---------------------	---	-------	---	---------------

## Product Information

- Product Dimensions (WxDxH): 807 x 468 x 600mm
- Up to 96% odour reduction
- Does not need external piping to discharge fumes and odours
- Technical Diagram: **Page 64**

## Accessories

 = AVAILABLE     = INCLUDED



Carbon.Zeo  
Filter

## Available Motor Speeds



## Ideal Cooking Style:



Model Code	Size	Hood Mounting	Motor Output	Lighting	Finish
F7SR80B1	80cm	Island	600 m³/h	Neon 3 x 13 W	Black
F7SR80W1 ▲	80cm	Island	600 m³/h	Neon 3 x 13 W	White



## Features & Benefits



LED Lighting



Recirculating



15 Minute  
Timer



Scotch Bright  
Finish

## Product Information

- Product Dimensions: Refer to table below
- Ducting: 150mm circular outlet
- Suitable for a 50-90cm cooking surface
- Technical Diagram: **Page 64**

## Accessories

= AVAILABLE

= INCLUDED



Carbon.Zeo  
Filter

*\*Recirculation option available*

## Available Motor Speeds

MODERATE

HEAVY

EXTREME

600m <sup>3</sup> /h	765m <sup>3</sup> /h	<b>800m<sup>3</sup>/h</b>	950m <sup>3</sup> /h	1000m <sup>3</sup> /h	1140m <sup>3</sup> /h	1300m <sup>3</sup> /h	1500m <sup>3</sup> /h	2010m <sup>3</sup> /h
----------------------	----------------------	---------------------------	----------------------	-----------------------	-----------------------	-----------------------	-----------------------	-----------------------

## Ideal Cooking Style:



**STEAMING**



**PAN FRYING**



**GRILLING**

Model Code	Size	Hood Mounting	Motor Output	Lighting	Finish
F3MV60B1 / W1	60cm	Built-In	800 m <sup>3</sup> /h	LED 2 x1.2W (3200 K)	Black/White
F3MV90B1 / W1	90cm	Built-In	800 m <sup>3</sup> /h	LED 2 x1.2W (3200 K)	Black/White
F3MV12B1 / W1	120cm	Built-In	800 m <sup>3</sup> /h	LED 2 x1.2W (3200 K)	Black/White

Specification sheets available to download at prkws.com



**MOTOR  
SOLUTIONS**

# ON BOARD MOTOR SOLUTIONS

---

	RECIRCULATING	ON BOARD MOTOR	
	600m <sup>3</sup> /h	800m <sup>3</sup> /h	950m <sup>3</sup> /h
Siena <sup>+</sup> 60			•
Siena <sup>+</sup> 90			•
Siena <sup>+</sup> 90 Deep			•
Gruppo Incasso		•	
Gruppo Incasso Pro			•
Gruppo Incasso NRS®		•	
Lumina NRS® Wall		•	
Lumina NRS® Island		•	
Plane NRS® Wall		•	
Plane NRS® Island		•	
Plane Top		•	
Luce Wall		•	
Luce Island		•	
Lumen		•	
Libra E.ION®	•		
Spring E.ION®	•		
Polar Island		•	
Polar Wall		•	
Move		•	

# OFF BOARD MOTOR SOLUTIONS

	IN ROOF MOTOR		EXTERNAL ROOF MOTOR			EXTERNAL WALL MOTOR		
	IR-765	IR-1140	ER-765	ER-1140	ER-2010	EW-765	EW-1140	EW-2010
Milano <sup>+</sup> 60	•	•	•	•		•	•	
Milano <sup>+</sup> 90	•	•	•	•		•	•	
Milano <sup>+</sup> 90 D		•		•	•		•	•
Milano <sup>+</sup> 120 D		•		•	•		•	•
Genova <sup>+</sup> 120					•			•
Treviso <sup>+</sup> 90		•		•	•		•	•
Roma 90	•	•	•	•		•	•	
Trento 120					•			•
Trento 120 Island					•			•

## MOTOR INSTALLS



In-Roof Motor



External Roof Motor



External Wall Motor

\*HBX200MET & HBX200TILE available as optional accessories for all roof motors

## MOTORS



In-Roof Motor



External Roof Motor



External Wall Motor

### MOTOR SPEEDS

765m<sup>3</sup>/h      1140m<sup>3</sup>/h      765m<sup>3</sup>/h      1140m<sup>3</sup>/h      2010m<sup>3</sup>/h      765m<sup>3</sup>/h      1140m<sup>3</sup>/h      2010m<sup>3</sup>/h

SEE PAGE 65 FOR DIMENSIONS

# OFF BOARD MOTOR SOLUTIONS

	RECIRCULATING MOTOR	EXTERNAL WALL MOTOR		IN-LINE MOTOR	
	UC-600	EW-1000	EW-1500	IN-950	IN-1300
Nube			•		•
Nuvola 90			•		•
Nuvola 140			•		•
Eclisse			•		•
Stella			•		•
Downdraft 90	•	•		•	•
Downdraft 120	•	•		•	•

## DOWNDRAFT MOTOR INSTALLS



Recirculating Motor



External Wall Motor



Remote Inline Motor

\*Can be installed under floor

## CASSETTE MOTOR INSTALLS



External Wall Motor



Remote Inline Motor

## MOTORS



Recirculating Motor



External Wall Motor



Remote Inline Motor

### MOTOR SPEEDS

600m<sup>3</sup>/h

### MOTOR SPEEDS

1000m<sup>3</sup>/h

1500m<sup>3</sup>/h

### MOTOR SPEED


950m<sup>3</sup>/h

1300m<sup>3</sup>/h

\*For Downdraft rangehoods only

\*For Downdraft and cassette rangehoods only


**SEE PAGE 65 FOR DIMENSIONS**

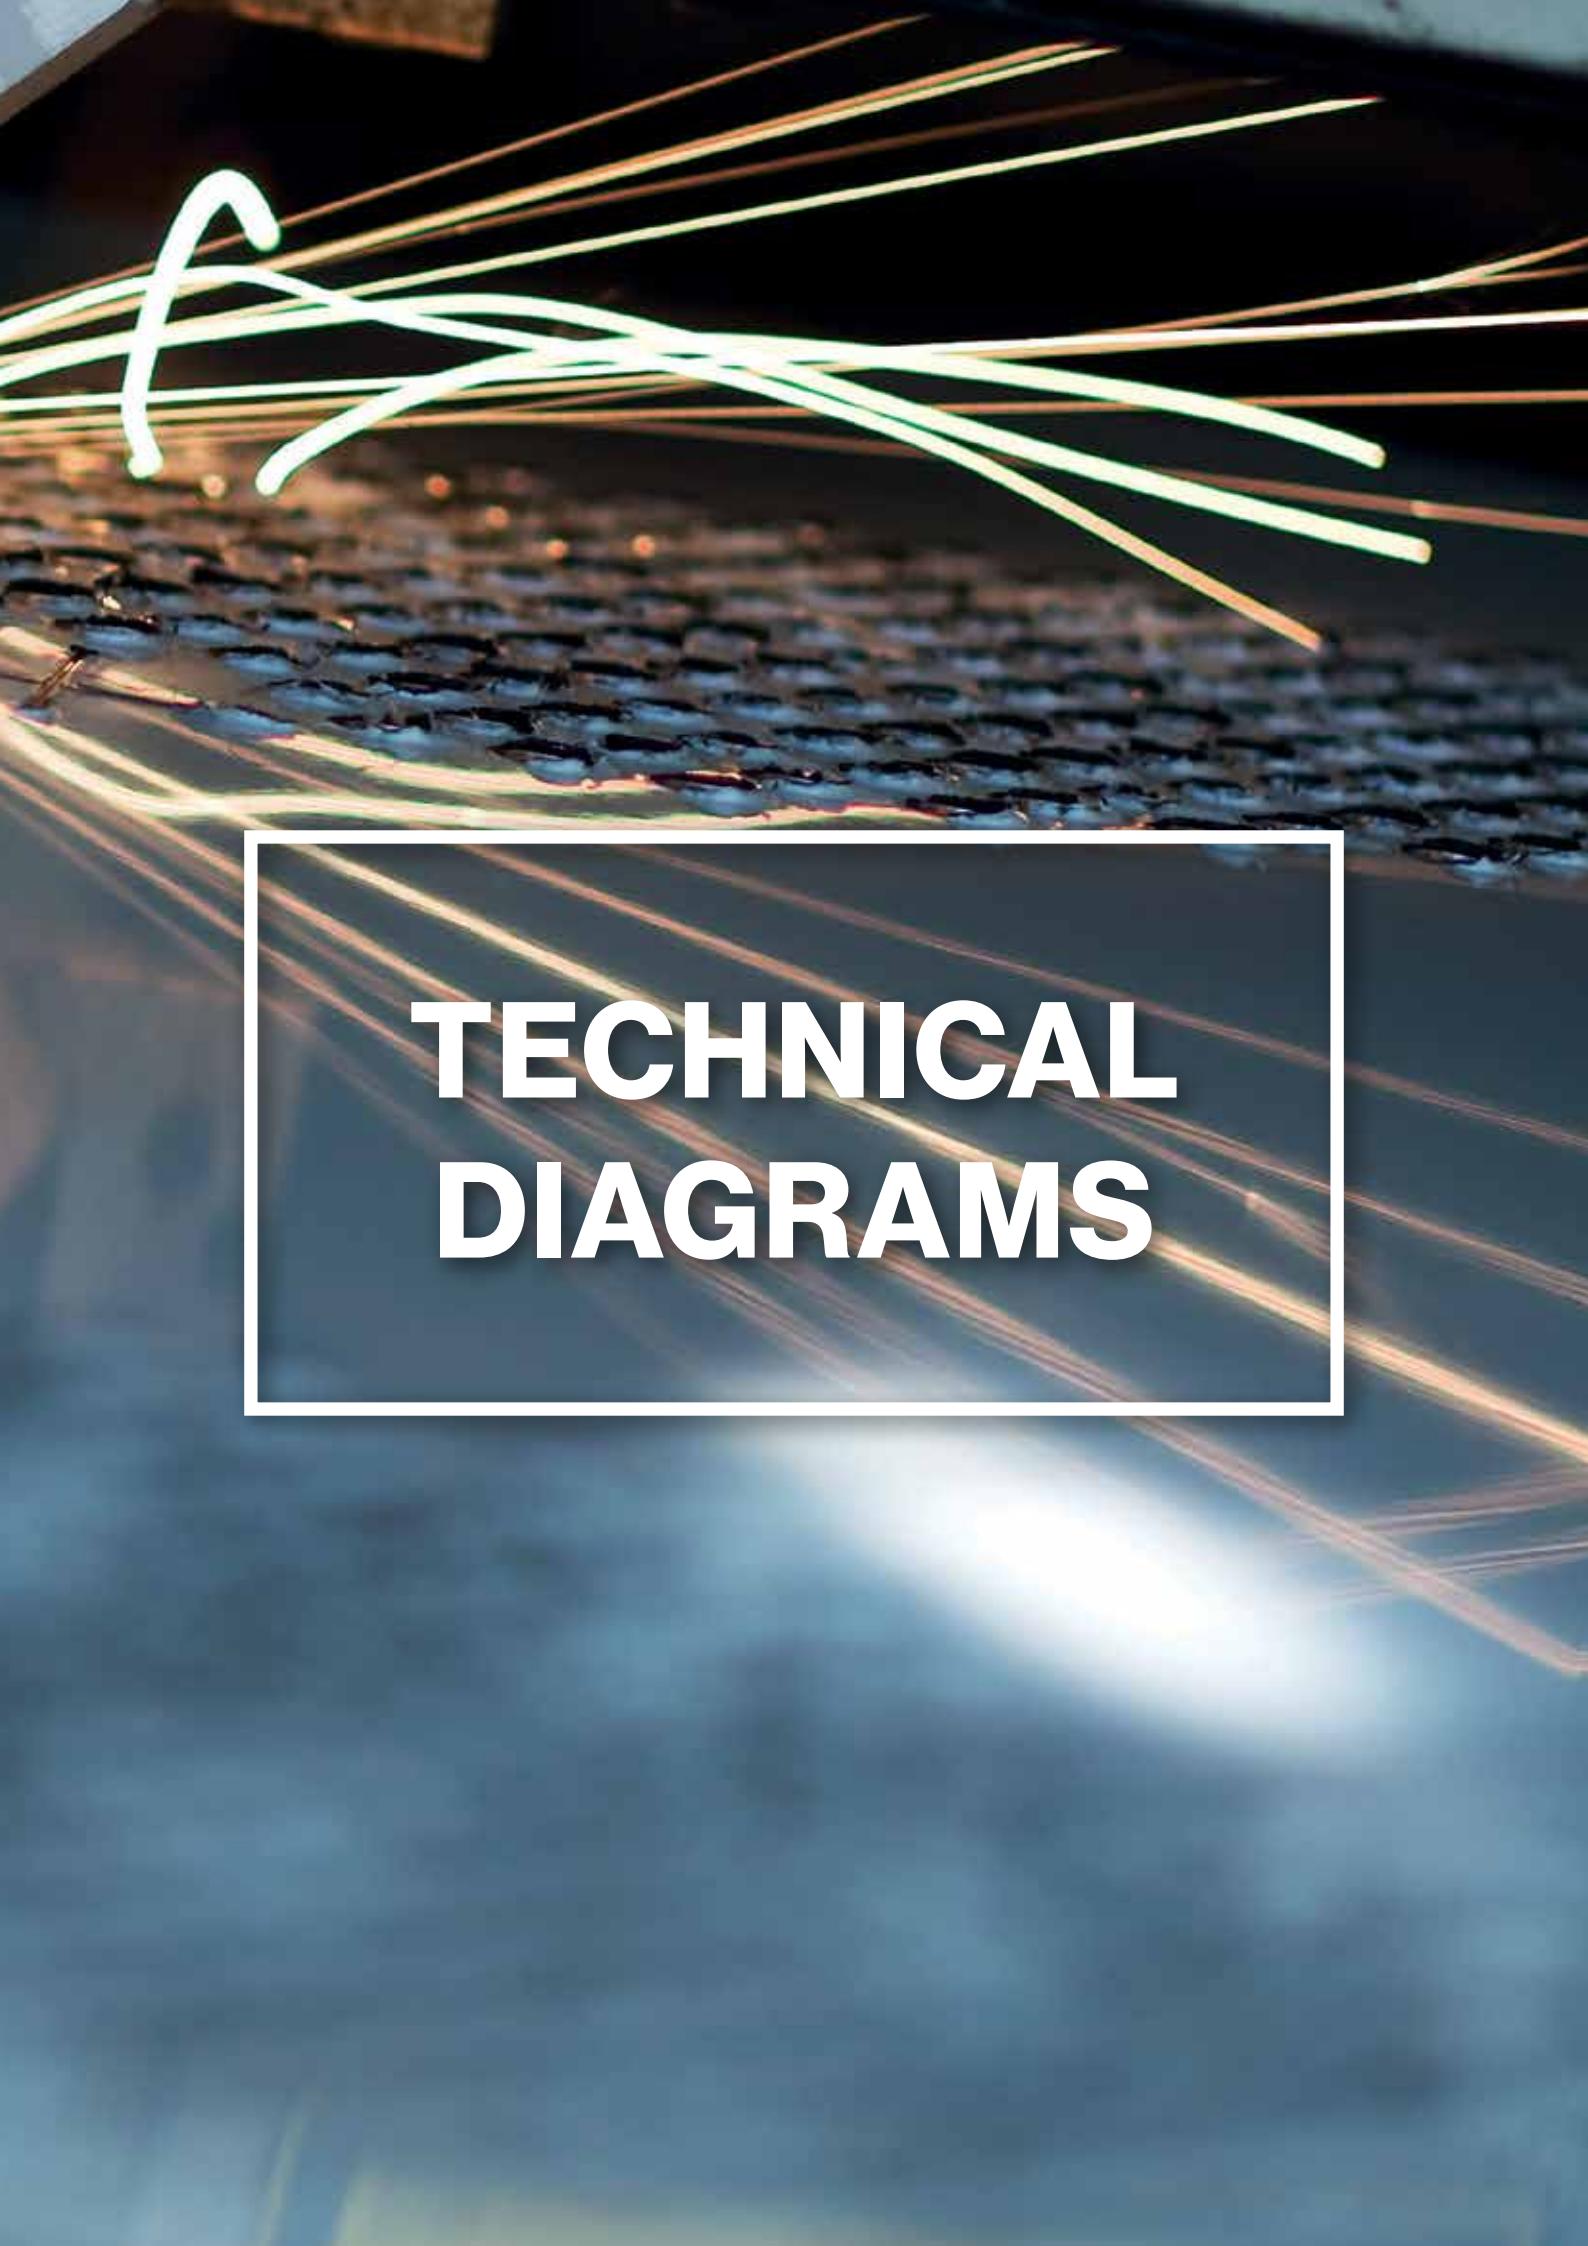


# TECHNICAL DIAGRAMS

# TECHNICAL DIAGRAMS–RANGEHOODS


MILANO<sup>+</sup> 60 (p. 16)

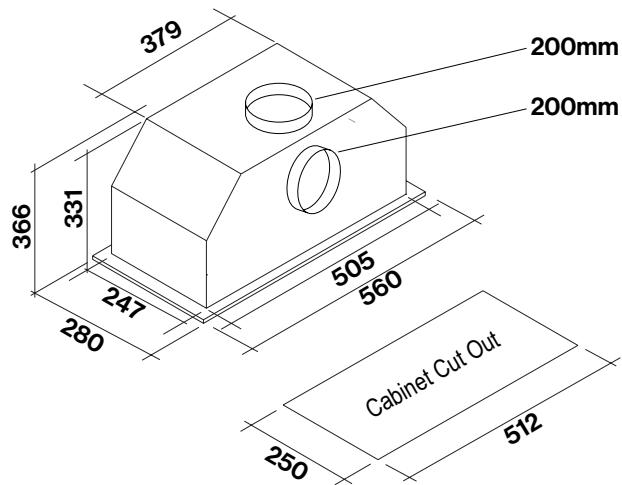


MILANO<sup>+</sup> 90 (p. 17)

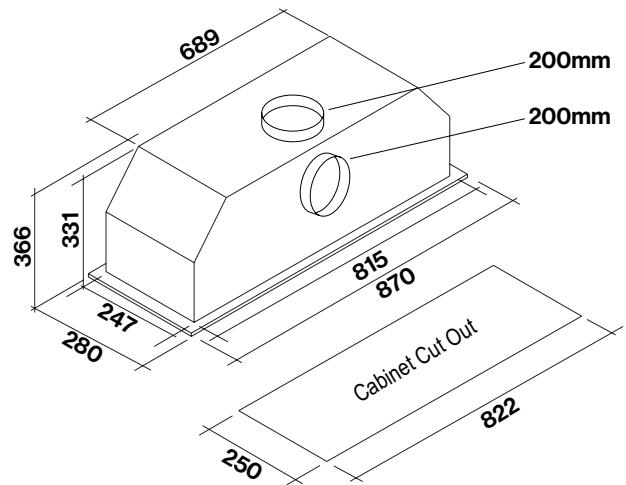


MILANO<sup>+</sup> 90 DEEP (p. 18)

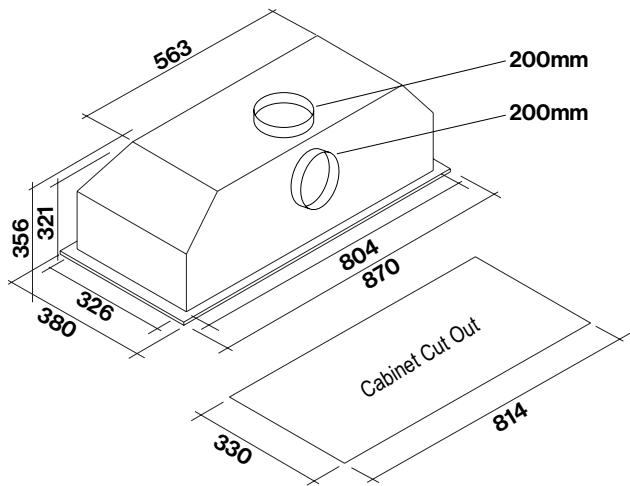


MILANO<sup>+</sup> 120 DEEP (p. 19)

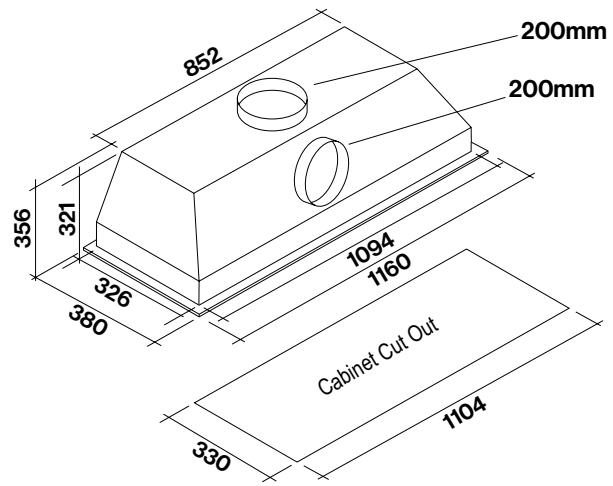

TREVISO 90 (p. 20)

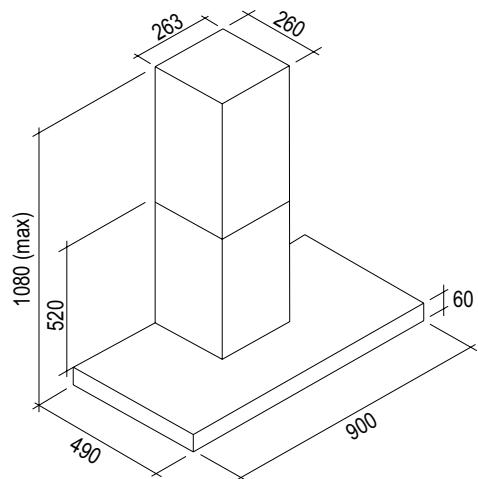


ROMA 90 (p. 21)

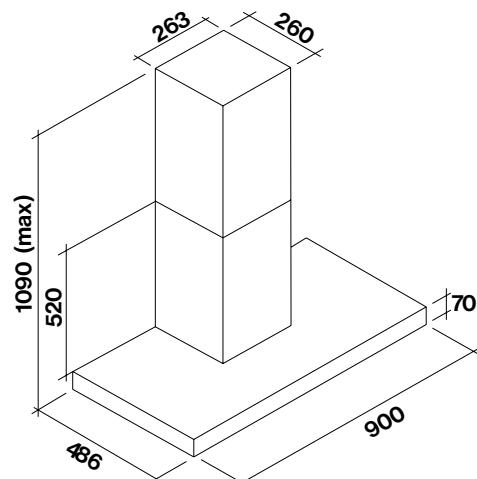


# TECHNICAL DIAGRAMS-RANGEHOODS

---


GENOVA<sup>+</sup> 120 (p. 22)

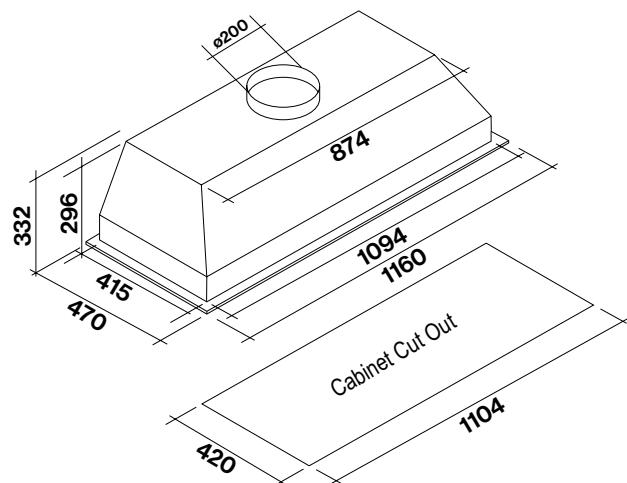


TRENTO 120 (p. 23)

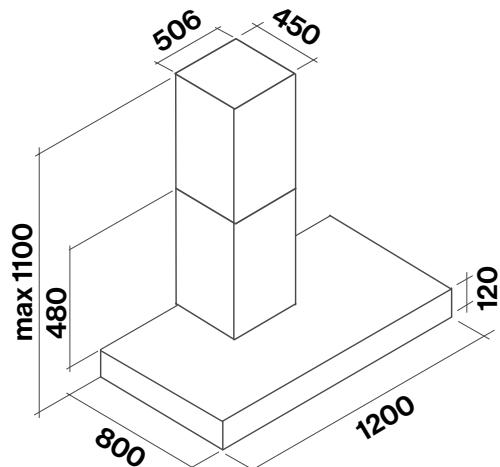


TRENTO 120 ISLAND (p.24)

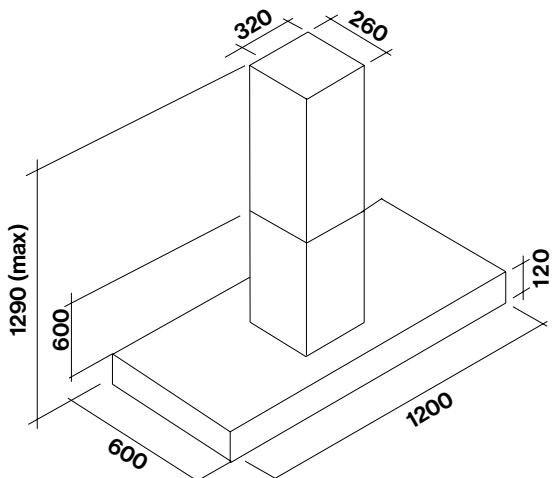


NUBE (p. 26)

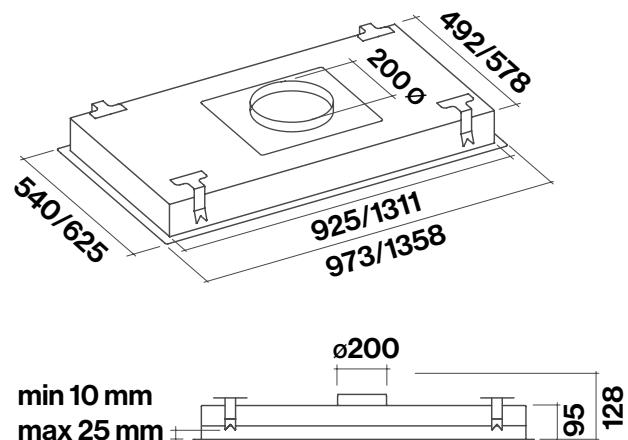

NUVOLA 90 (p. 27)

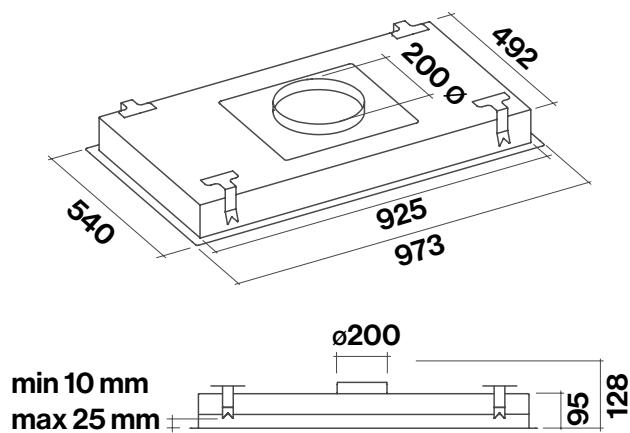


NUVOLA 140 (p. 28)

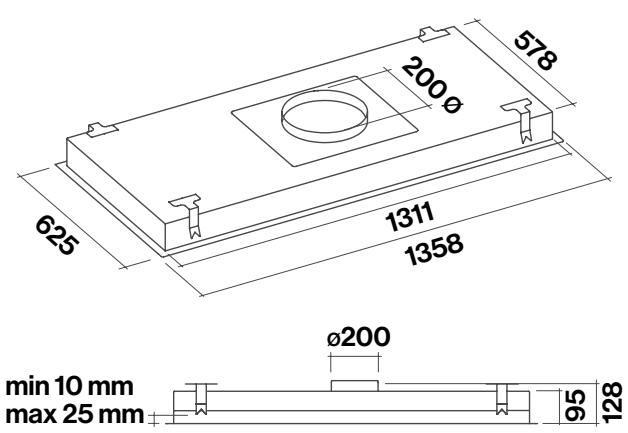


# TECHNICAL DIAGRAMS–RANGEHOODS

ECLISSE (p. 29)

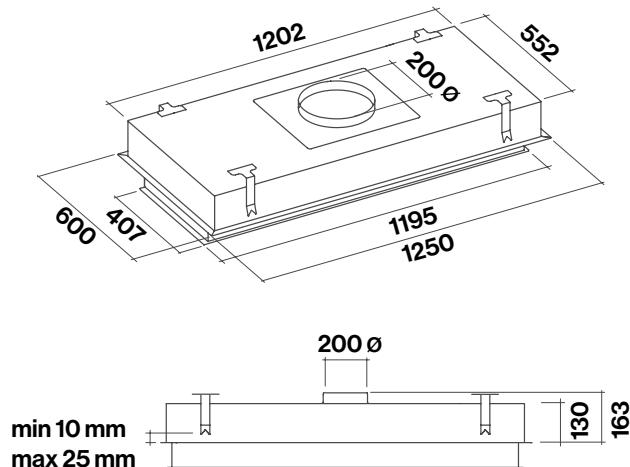


STELLA (p. 30)

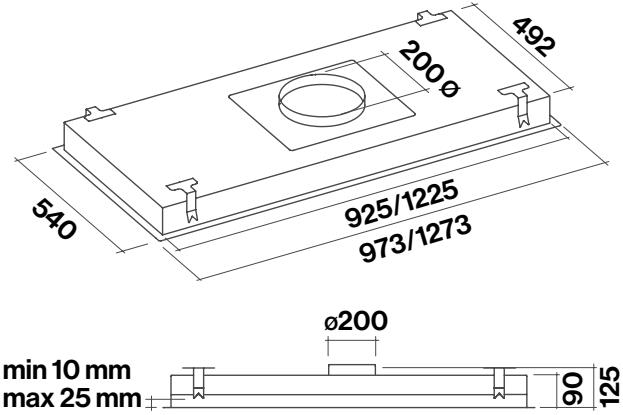


DOWNDRAFT 90 (p. 32)

INLINE VERSION




RECIRCULATING VERSION




\*1300M<sup>3</sup>/H MOTOR **CANNOT** BE ATTACHED TO BODY

DOWNDRAFT 120 (p. 33)

INLINE VERSION




RECIRCULATING VERSION




\*1300M<sup>3</sup>/H MOTOR **CANNOT** BE ATTACHED TO BODY

SIENA<sup>⊕</sup> 60 (p. 36)

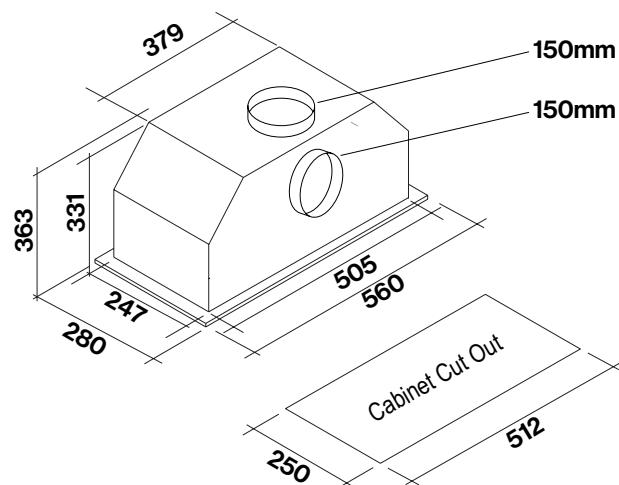


SIENA<sup>⊕</sup> 90 (p. 37)

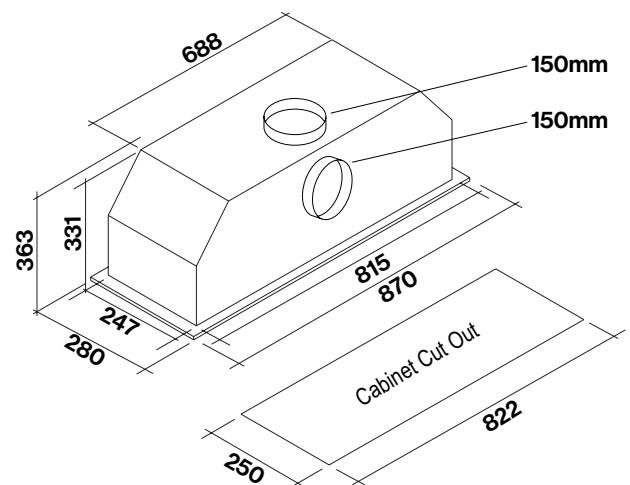


# TECHNICAL DIAGRAMS - RANGEHOODS


SIENA® 90 DEEP (p. 38)

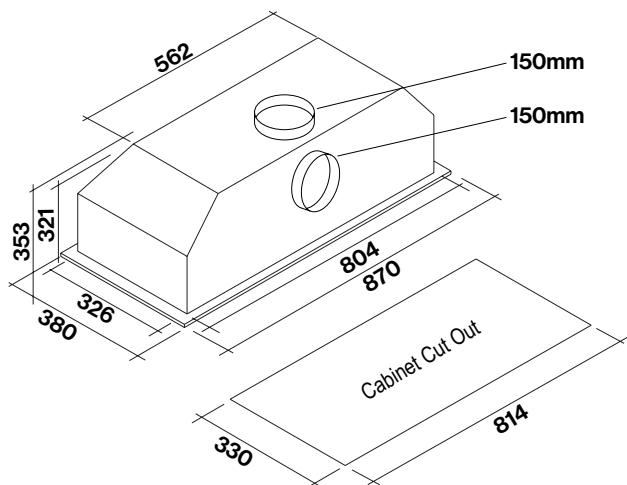


GRUPPO INCASSO (p. 39)

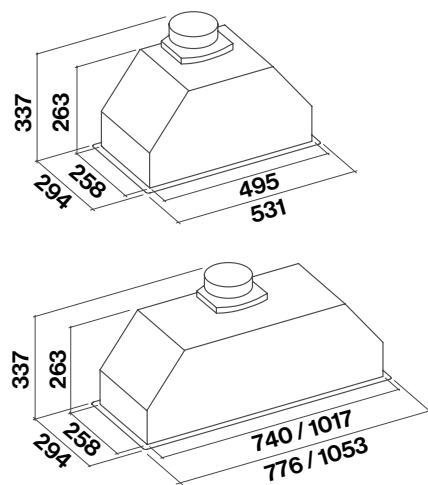


GRUPPO INCASSO PRO (p. 40)

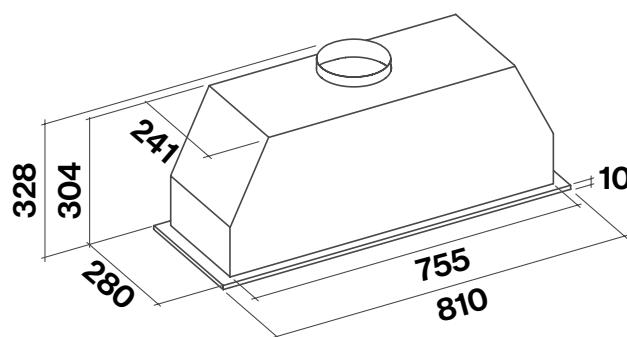


GRUPPO INCASSO NRS® (p. 41)

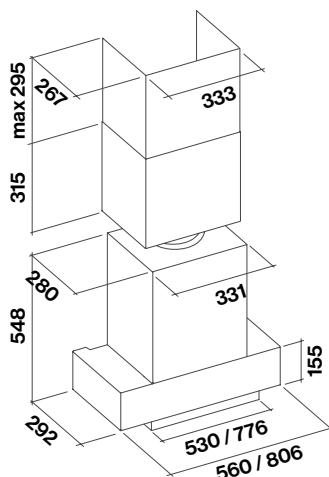

LUMINA NRS® WALL (p. 42)

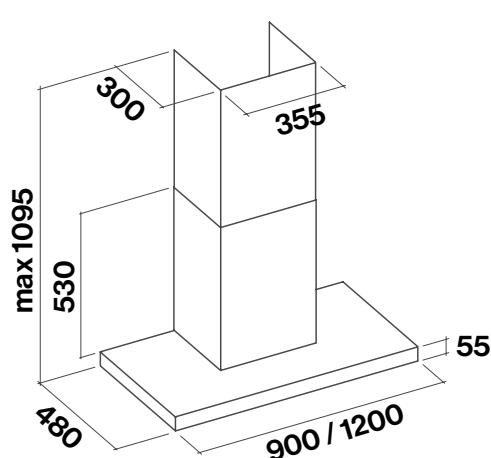


LUMINA NRS® ISLAND (p. 43)

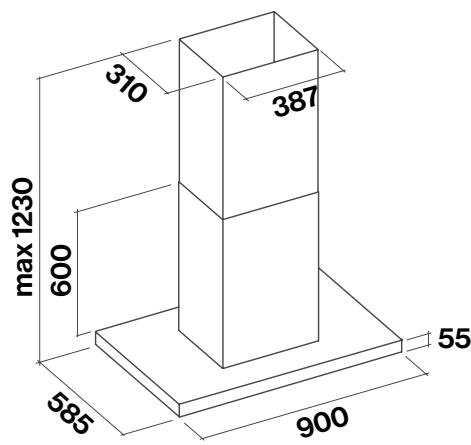


# TECHNICAL DIAGRAMS-RANGEHOODS


PLANE NRS® WALL (p. 44)

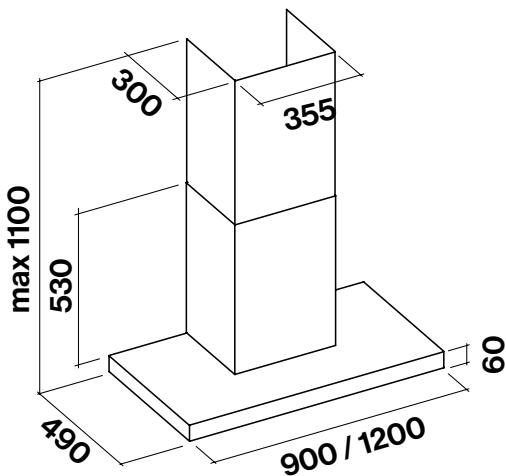


PLANE NRS® ISLAND (p. 45)

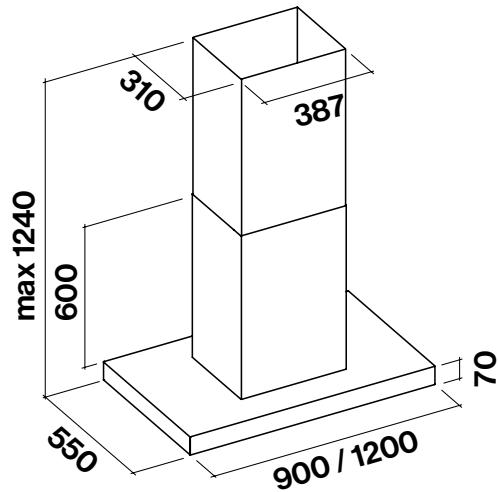


PLANE TOP (p. 46)

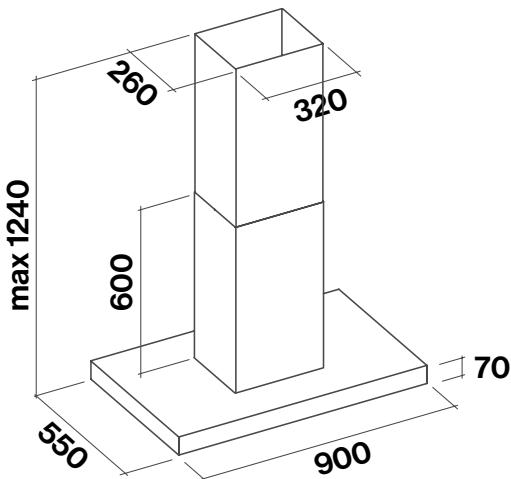


LUCE WALL(p. 47)

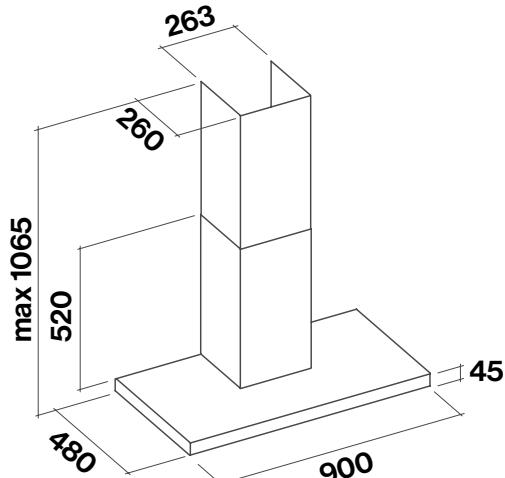

LUCE ISLAND (p. 48)

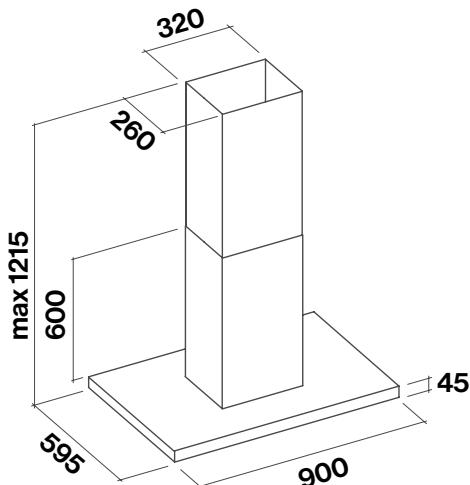


LUMEN (p. 49)

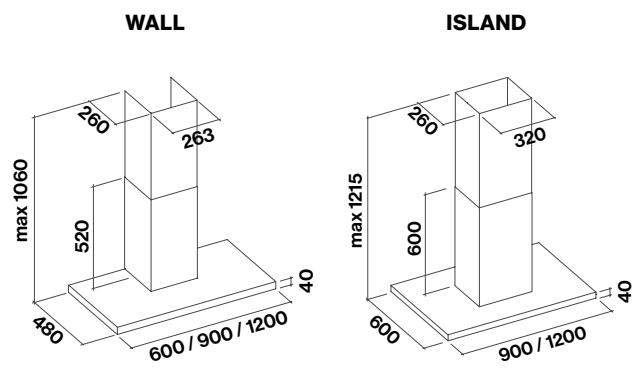


# TECHNICAL DIAGRAMS-RANGEHOODS

---


POLAR WALL (p. 50)

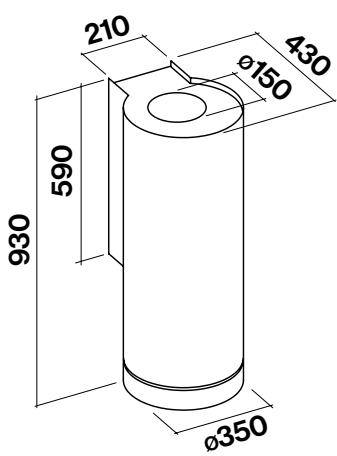


POLAR ISLAND (p. 51)

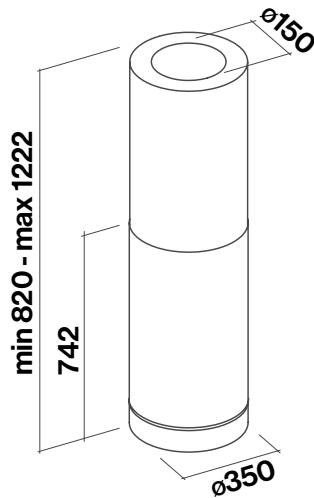

SPRING E.ION® (p. 52)

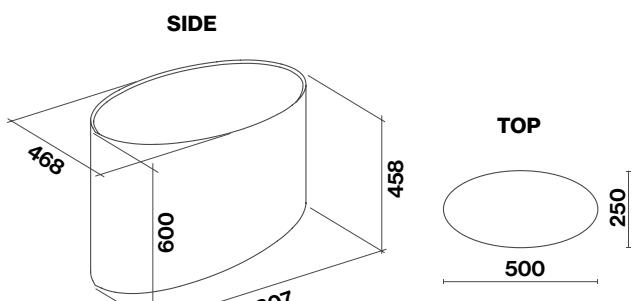

MOVE (p. 53)

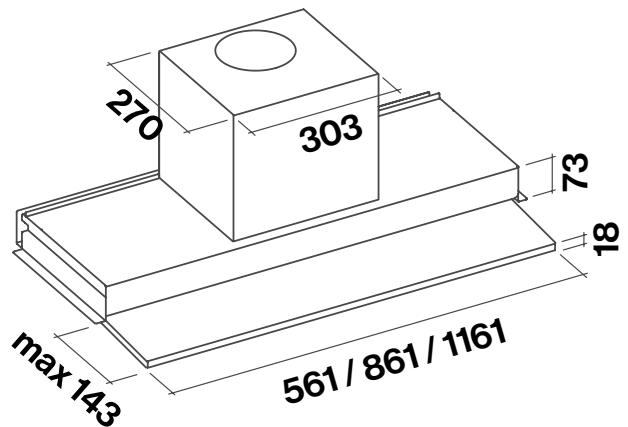


# TECHNICAL DIAGRAMS—MOTORS


IN-ROOF MOTOR (p. 56)

**IN-765m<sup>3</sup>/h – IN-1140m<sup>3</sup>/h**

SIDE VIEW





TOP VIEW



EXTERNAL ROOF MOTOR (p. 56)


**ER-765m<sup>3</sup>/h – ER1140m<sup>3</sup>/h**

**ER-2010m<sup>3</sup>/h**

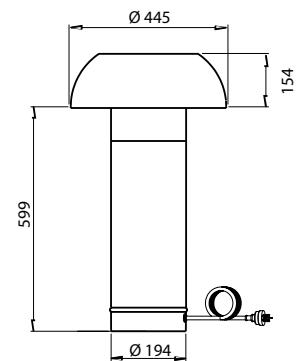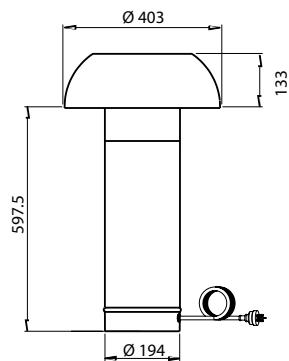


EXTERNAL WALL MOTOR (p. 56)

**EW-765m<sup>3</sup>/h – EW-1140m<sup>3</sup>/h**

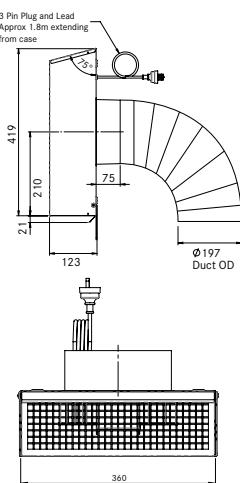


**2010m<sup>3</sup>/h**

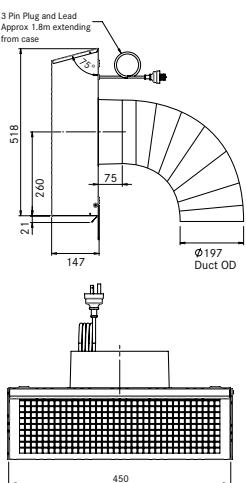


RECIRCULATING MOTOR (p. 57)

**UC-600m<sup>3</sup>/h**

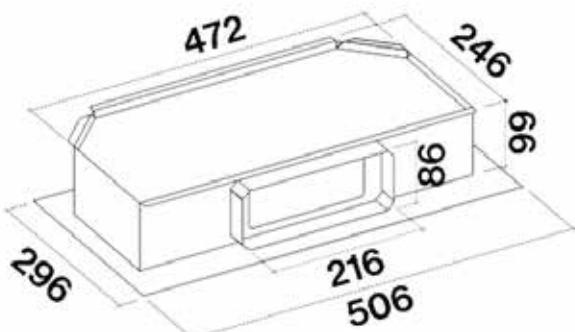


EXTERNAL WALL MOTOR (p. 57)

**EW-1000m<sup>3</sup>/h**

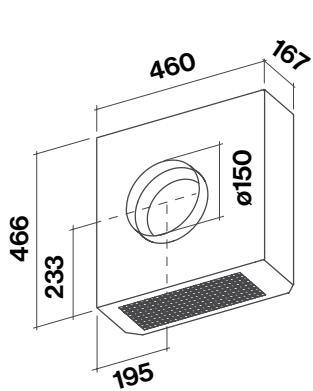


**EW-1500m<sup>3</sup>/h**

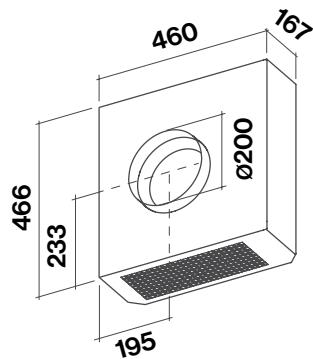


REMOTE INLINE MOTOR (p. 57)

**950m<sup>3</sup>/h**



**1300m<sup>3</sup>/h**







## **WARRANTY**

All Falmec rangehoods come with a 5 year warranty on parts and labour and a further 5 years warranty on parts only for the remote motor.

For full warranty details including terms and conditions, please refer to the Falmec website [www.falmec.com.au](http://www.falmec.com.au)

## **TERMS & CONDITIONS**

Due to ongoing research and development, the manufacturer reserves the right to change specifications without notice. If specifications are critical to end use, please ask your local retail agent. This information is provided without prejudice to the standard terms and conditions of the sale of the distributor. This brochure supersedes all previous brochures. All due care has been taken while compiling this brochure at the time of print, however no responsibility is taken for error.

## **KEY INSTALLATION NOTES**

The Falmec off-board rangehood remote collection removes the fan motor from the internally mounted rangehood unit. Placing the fan motor in a separate internal or externally mounted housing considerably reduces noise generated from motor operation. It is important to note that as a result of the high extraction levels offered by the off-board motors, air flow noise on settings three (3) and four (4) will still be audible. For optimum results, the remote motor unit should be installed three (3) to five (5) metres from the outlet of the hood unit. It is also highly recommended that the diameter of the ducting should not be reduced from 200mm, a gentle bend be contoured in the ducting and that all ducting is pulled tight and any excess removed.


## **CUSTOMER CARE**

For more installation assistance please call  
PR Kitchen & Washroom Systems  
**AU** +61(0)3 9700 9100  
**NZ** +64 9964 0400.

# FALMEC PRODUCT CHECKLIST

---

## UNDERMOUNT HOOD

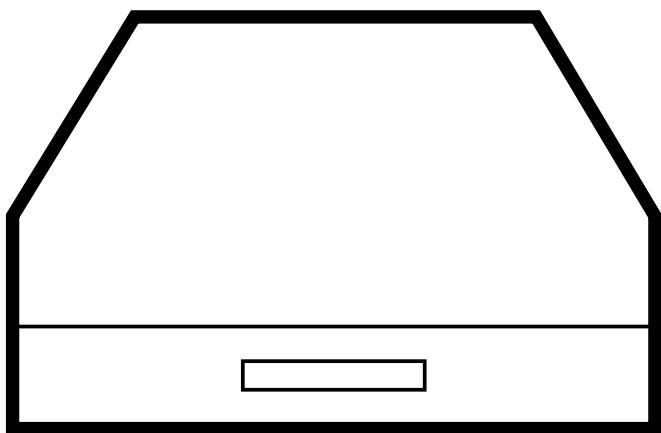

MODEL: \_\_\_\_\_

OFF BOARD/ON BOARD MOTOR: \_\_\_\_\_

SIZE: \_\_\_\_\_


MOTOR OPTION: \_\_\_\_\_

INSTALL METHOD: \_\_\_\_\_

COOKING STYLE: \_\_\_\_\_

PRICE: \_\_\_\_\_

## T-SHAPE CANOPY

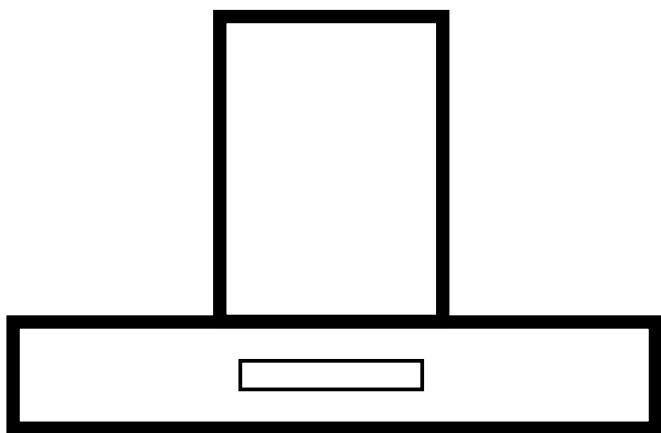

MODEL: \_\_\_\_\_

OFF BOARD/ON BOARD MOTOR: \_\_\_\_\_

SIZE: \_\_\_\_\_

MOTOR OPTION: \_\_\_\_\_

INSTALL METHOD: \_\_\_\_\_

COOKING STYLE: \_\_\_\_\_

PRICE: \_\_\_\_\_

## NOTES

